

► Code Number

3782644

► Description

Exposed Urinal Flushometer for 3/4" top spud urinals.

► Flush Cycle

- 0.125 gpf/0.5 Lpf

► Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated High Efficiency Urinal Flushometer with the following features:

- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Vacuum Breaker with Flush Connection
- Spud Coupling and Spud Flange for 3/4" Top Spud
- Sweat Solder Adapter with Cover Tube and Cast Wall Flange
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- High Efficiency flush accuracy
- Diaphragm, Handle Packing and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

► Variations

DBP - Dual-Bypass Diaphragm


SG SaniGuard® Antimicrobial Coating Protects Handle* * SaniGuard does not protect users or others against disease-causing bacteria.

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories

► Fixtures

Consult factory for matching Sloan brand fixture options.

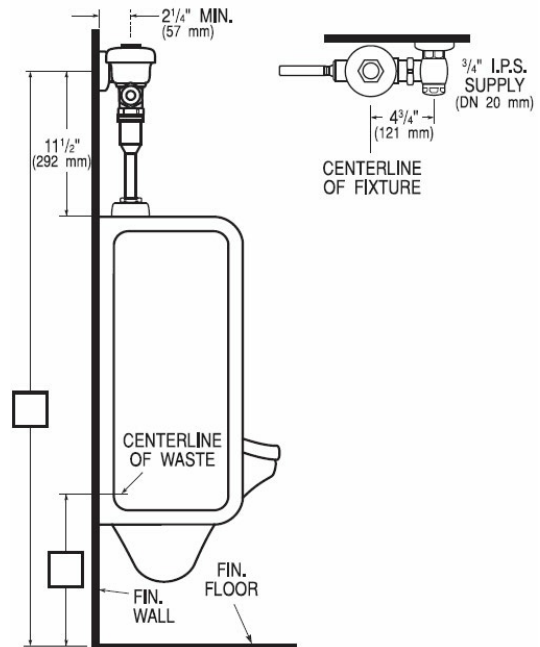

► Disclaimer

All information contained within this document subject to change without notice.

► Compliance & Certifications

**Made In The
USA**



This space for Architect/Engineer Approval