

**Part No:** HTS3S-251

**Schedule 80 PVC & CPVC**

**Hot-Tap Saddle**

**Desc:** 2X1-1/2 PVC HOT TAP SADDLE FKM SS CUTTER

**MSRP:** 984.53

**Part Code:** 049

**Weight(lbs):** 2.213


**Weight(kg):** 1.004

**Weight(gm):** 1004

**Size:** 2 X 1-1/2 SOC (2"SPG)

**Color:** GRAY

**Material:** PVC

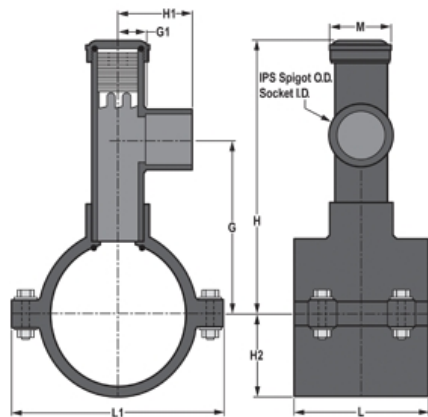

**L** = 2-7/16

**G** = 4-1/2

**G1** = 1-1/4

**H** = 8-1/2

**H1** = 2-11/16

**H2** = 1-1/2

**M** = 2-7/8

**L1** = 3-7/16

**Connection** Saddle x Socket (Spigot) - LEAD FREE

**Hardware** SS316

**O-Ring** FKM

**Cutter** SS316

**Type** Hot-Tap

## Injection Molded Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses;  $\pm 1/32$  inch.

**H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses;  $\pm 1/32$  inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows;  $\pm 1/32$  inch

**L** = Overall length of fittings;  $\pm 1/16$  inch.

**M** = Outside diameter of socket/thread hub;  $\pm 1/16$  inch.

**N** = Socket bottom to socket bottom; couplings;  $\pm 1/16$  inch.

**W** = Height of cap;  $\pm 1/16$  inch

## Typical Molded Dimension References

