

► Code Number

3141002

► Description

Exposed Water Closet Flushometer for floor mounted back spud bowls. Especially suited for harsh water conditions.

► Flush Cycle

- Model 122-1.6 (Factory set at 1.6 gpf/6.0 Lpf)

Valve Adjustment Range: 1.5 gpf/5.7 Lpf to 7.0 gpf/26.5 Lpf

► Specifications

Quiet, Exposed, Adjustable Piston Type, Chrome Plated Closet Flushometer with the following features:

- Trap Primer
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Vacuum Breaker Flush Connection
- Self-cleaning Xpelor® Bypass
- 1" I.P.S. Screwdriver Bak-Chek™ Angle Stop with Vandal Resistant Stop Cap
- Stamped Wall Flange
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX® Rubber Compound for Chloramine Resistance
- Spud Coupling and Flange for 1½" Back Spud
- Ultra High Copper, Low Zinc Brass Castings for Dezincification and Salt Water Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.

► Variations

- YI Two Wall Bumpers (for open front seat without cover)
- Less Vacuum Breaker
- Sweat Solder Adapter Kit
- Sweat Solder Adapter & Cast Wall Flange with Set Screw
- Ground Joint Stop and Tailpiece
- 1¼" Flush Connection and Spud Coupling"


"NOTE: Bak-Chek™ Angle Stop available with 1" Whitworth Thread (please specify)."

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

► Product Number

122-1.6

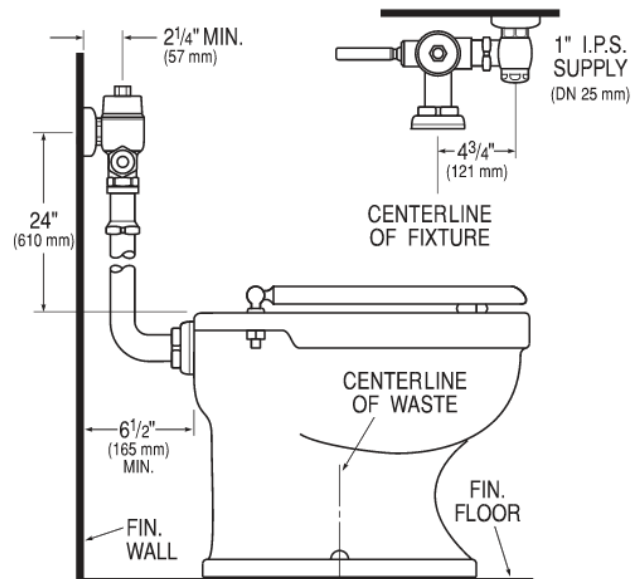

► Compliance & Certifications



This space for Architect/Engineer Approval