

► Code Number

3143080

► Description

Concealed Urinal Flushometer for 1¼" back spud urinals. Especially suited for harsh water conditions.

► Flush Cycle

- Model 190-1.0 (Factory set at 1.0 gpf/3.8 Lpf)

Valve Adjustment Range: 0.5 gpf/1.7 Lpf to 3.0 gpf/11.4 Lpf

► Specifications

Quiet, Concealed, Adjustable Piston Type, Rough Brass Urinal Flushometer with the following features:

- Trap Primer
- Exposed Parts Chrome Plated
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Vacuum Breaker Flush Connection
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Self-cleaning Xpelor® Bypass
- Ultra High Copper, Low Zinc Brass Castings for Dezincification and Salt Water Resistance
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX® Rubber Compound for Chloramine Resistance
- Double Slip Elbow Flush Connection and Spud Coupling for 1¼" Concealed Back Spud

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.

► L Dimension

Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾" (70 mm).


► Variations

- For installation with Sloan Easy Access® Wall Box
- 1½" Flush Connection"
- Less Vacuum Breaker
- Sweat Solder Adapter Kit
- Ground Joint Stop and Tailpiece

"NOTE: Bak-Chek™ Angle Stop available with 1" Whitworth Thread (please specify)."

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

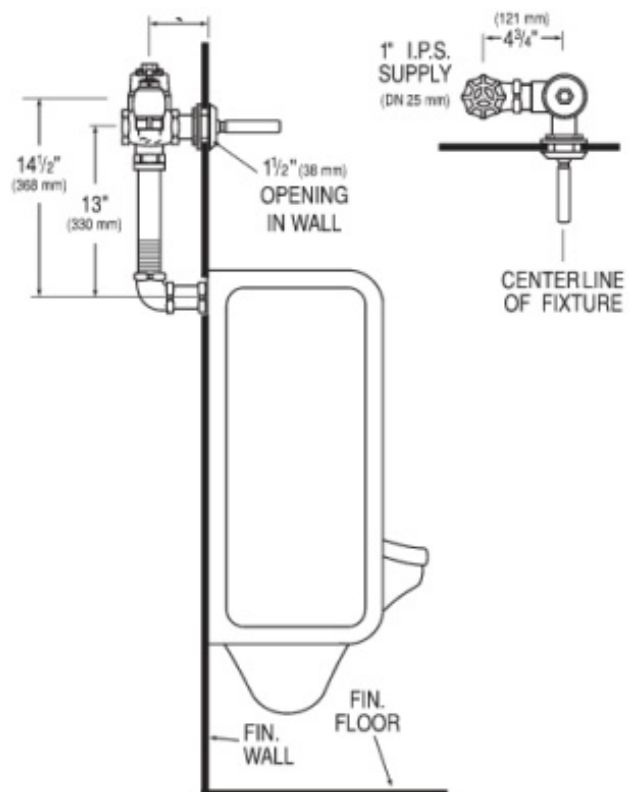

► Compliance & Certifications



This space for Architect/Engineer Approval