

► Code Number

3913411

► Description

Concealed Hydraulically Operated Water Closet Flushometer, for back inlet squat toilet.

► Flush Cycle

1.28 gpf/4.8 Lpf

► Specifications

Quiet, Concealed, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- Chrome Plated Exposed Flushometer Parts
- Low Consumption flush accuracy
- ADA Compliant Non-Hold-Open Actuator
- Vacuum Breaker Flush Connection for 1½" Back Inlet
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation.
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop

► Variations

2-10 3/4 LDIM

MBFW - Metal Button Fixture Wall included


Hydraulic Flushometer can also be provided in Regal® Models. All rough-in dimensions remain the same. Consult the factory.

► L Dimension

Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾" (70 mm).

► Actuator Types: (not included-order separately-please check one)

- ☐ Fixture Wall Actuator (HY-33-A) (rear access required)
- ☐ MBPM - Metal Button Panel Mount (HY-108-A)
- ☐ See Actuator Specification pages for details on Actuators.
- ☐ MP - Metal Partition Actuator (HY-49-A)
- ☐ MBFW - Metal Button Fixture Wall Actuator (HY-100-A) (rear access required)
- ☐ SW - Side Wall Mounted Actuator (HY-72-A)

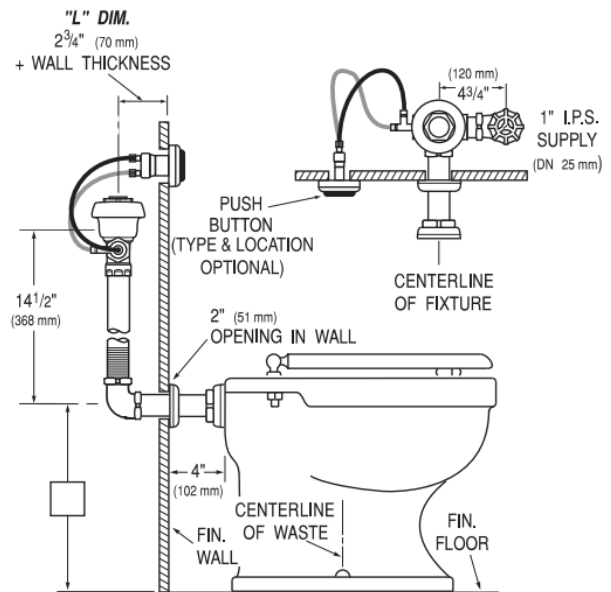

► Compliance & Certifications



This space for Architect/Engineer Approval