

► Code Number:

10101015

► Description

Complete HEU system with concealed, Royal® urinal flushometer and vitreous china urinal fixture.

► Specifications

Quiet, concealed, diaphragm type, rough brass urinal flushometer for either left or right hand supply and vitreous china urinal with the following features:

► Flush Cycle

0.125 gpf/0.5 Lpf

► Flushometer Specification

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Bypass
- ¾" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- High Back Pressure Vacuum Breaker
- Spud Coupling for ¾" Concealed Rear Spud Urinal
- Elbow Flush Connection
- Exposed Parts Chrome Plated
- ADA Compliant Metal Oscillating Non-Hold-Open Handle with Triple Seal Handle Packing
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾" (70 mm).
- High copper, low zinc brass castings for dezincification resistance
- Flush accuracy controlled by CID® technology
- Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037/ ASME A112.19.2/CSA B45.1
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance

► Fixture Specifications

- Wall mounted Vitreous china
- Washdown flushing action and Integral flushing rim
- Vandal resistant strainer assembly included
- All mounting hardware included
- Carrier not included
- Compliant with Buy American Act when purchased as a combination
- 100% factory flush tested
- Complies to the applicable sections of: ANSI/ASME A112.19.2 and CSA B45.1
- ¾" I.P.S. top spud inlet


► Note

All vitreous china dimensions shown in these drawings are nominal. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. Please take this into consideration when planning rough-in and plumbing layouts.

- Minimum Flowing Pressure: 25 PSI

Plumbing System Requirements

- Maximum Fixture Static Pressure: 80 PSI

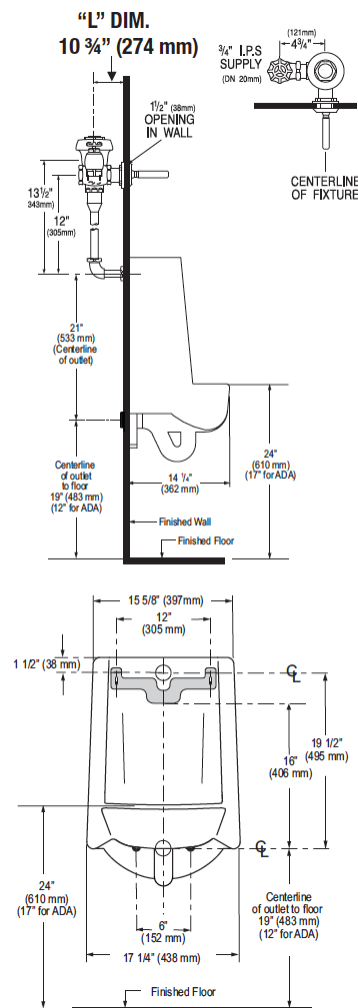

► Compliance & Certifications



This space for Architect/Engineer Approval