

► Code Number

24531010

► Description

Complete HET system with exposed manual Sloan® closet flushometer and vitreous china wall hung fixture.

► Flush Cycle

1.6 gpf/6.0Lpf

► Specifications



Quiet, exposed, diaphragm type, chrome plated closet Flushometer and vitreous china wall hung water closet with the following features:

- High Chloramine Resistant PERMEX® Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing Action™
- ADA compliant metal oscillating Non-Hold-Open Handle with Triple Seal Handle Packing
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop
- High Back Pressure Vacuum Breaker Flush Connection with One-piece Bottom Hex Coupling Nut
- Sweat Solder Adapter with Cover Tube and Cast Wall Flange with Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Flush accuracy controlled by CID® technology
- Diaphragm, Handle Packing, Stop Seat and Vacuum Breaker molded from PERMEX® rubber compound for chloramine resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

- Spud Coupling and Flange for 1½" Top Spud
- Wall hung vitreous china
- Siphon jet flushing action and Water spot area 9" x 8-1/2"
- 1-1/2" I.P.S. top spud inlet
- 2 1/8" fully glazed trapway diameter with Integral flushing rim
- Mounting hardware, carrier and toilet seat not included
- Recommended seats:
 - Bemis - 1955CT/1955SSCT & 2155CT/2155SSCT
 - Church - 295CT/295SSCT & 2155CT/2155SSCT
- Compliant with Buy American Act when purchased as a combination

Water closet shall be in compliance to the applicable sections of ASME A112.19.2/CSA B45.1

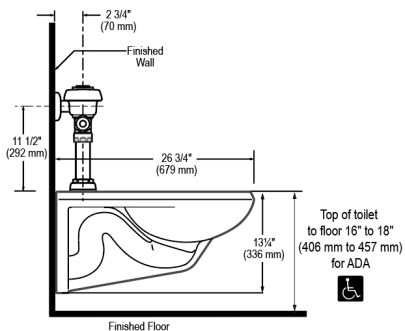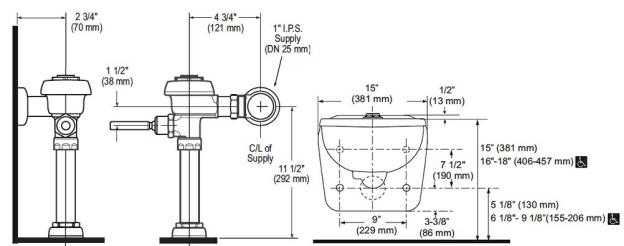

Plumbing System Requirements

Minimum Flowing Pressure: 25 PSI / Minimum Flow Rate: 18 GPM / Maximum Fixture Static Pressure: 80 PSI

NOTE: All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

► Compliance & Certifications



This space for Architect/Engineer Approval