

**Part No:** 4254-030

**FlameGuard®**

**Flange**

**Desc:** 3 CPVC FLAMEGUARD V/S FLANGE SOC CL150

**MSRP:** 47.65

**Part Code:** 070

**Weight(lbs):** 1.768

**Weight(kg):** 0.802

**Weight(gm):** 802

**Size:** 3"


**Color:** ORANGE

**Material:** CPVC

**Type** Flange - Two Piece

**Connection** Socket

**Pressure Rating** 175 psi (1.21 Mpa) @ 150° F

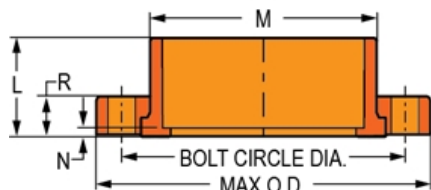

**L** = 2-1/16

**M** = 4- 1/4

**N** = 3/16

**Max. O.D.** = 7-17/32

**R** = 1-1/16

**No of Bolts** = 4

**Bolt Circle Dia.** = 6

**Bolt Size** = 5/8

**Min. Bolt Length** = 3-1/4

## Injection Molded Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

**H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

**L** = Overall length of fittings; ± 1/16 inch.

**M** = Outside diameter of socket/thread hub; ± 1/16 inch.

**N** = Socket bottom to socket bottom; couplings; ± 1/16 inch.

**W** = Height of cap; ± 1/16 inch

## Typical Molded Dimension References

