

► Code Number

3010125

Description

Exposed, Battery Powered, Sensor Activated, Royal® Optima® SMOOTH™ Water Closet Flushometer for floor mounted or wall hung top spud bowls.

Flush Cycle

3.5 gpf/13.2 lpf

Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Closet Flushometer with the following features:

FLUSHOMETER

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange w/Set Screw
- 25 to 80 psi Operating Range
- Flush accuracy controlled by CID® technology
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Free Spinning Vandal Resistant Stop Cap
- Diaphragm, Stop Seat and Vacuum Breaker to be molded from PERMEX® rubber compound for Chloramine resistance
- Spud Coupling and Flange for 1 1/2" Top Spud

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Optima SMOOTH Unit

- Sensor with Automatic Range Adjustment
- Four (4) Size C Batteries included
- ADA Compliant OPTIMA® SMOOTH® Battery Powered Infrared Sensor for automatic "Hands-free" operation
- "Low Battery" Flashing LED
- "User in View" Flashing LED
- Chrome Plated Infrared Sensor Housing

Fixtures

- Consult factory for matching Sloan brand fixture options.



► FEATURES

Economical

- Automatic operation provides water usage savings over other flushing devices. Reduces maintenance and operation costs.

Hygienic

- The Royal® OPTIMA® SMOOTH™ Flushometer System is the next advancement in hygiene. User makes no physical contact with the Flushometer surface except to initiate the Mechanical Manual Override Flush Handle when required. Helps control the spread of infectious diseases.

► Compliance & Certifications



This space for Architect/Engineer Approval

► ELECTRICAL SPECIFICATIONS

Control Circuit

- 6 VDC Input

Sensor Type

- Active Infrared with Automatic Adjustment

Sensor Range

- Normal Range: 26" - 32" (660 mm-813 mm)
- Reduced Range: 20" - 26" (508 mm-660 mm)

Battery Type

- (4) C Alkaline


Indicator Lights

- User in View


Operating Pressure

- 25-80 psi (172-552 kPa)


► OPERATION



1. A continuous, invisible light beam is emitted from the SMOOTH unit's Infrared Sensor.




2. When the user enters the sensor's effective range, the Red LED light in the sensor window flashes for eight seconds. After eight seconds of sensing the user, the light will stop flashing and the unit waits for the user to step away before initiating a flush cycle




3. When the user steps away, the unit initiates a flush cycle. The unit then automatically resets and is ready for the next user.

► ROUGH-IN

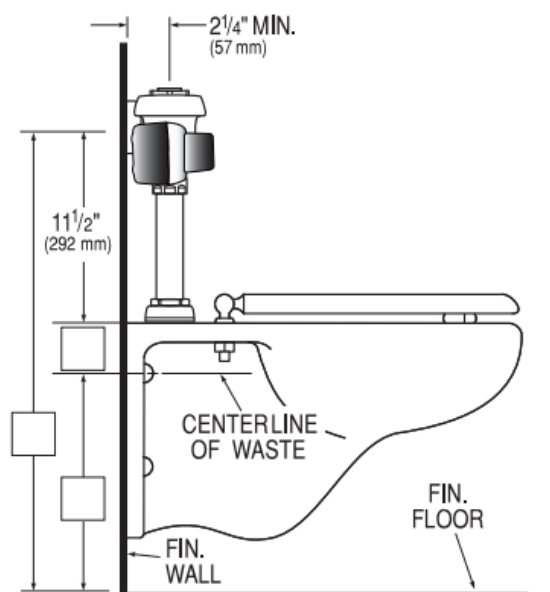

SIDE VIEW

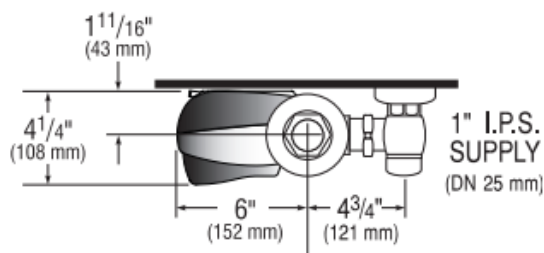

CENTERLINE
OF FIXTURE

TOP VIEW