

► Code Number

3913405

► Description

Concealed Hydraulically Operated Water Closet Flushometer, for back inlet squat toilet.

► Flush Cycle

1.6 gpf/6.0Lpf

► Specifications

Quiet, Concealed, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- ADA Compliant Non-Hold-Open feature type Actuator (not included, order separately-specify Actuator type listed below)
- Chrome Plated Exposed Flushometer Parts
- Low Consumption flush accuracy
- Vacuum Breaker Flush Connection for 1½" Back Inlet
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation.
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

► Variations

2-10 3/4 LDIM

MBPM - Metal Button Panel Mount Actuator

E - Straight Stop Variation

► L Dimension

Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾" (70 mm).

► Actuator Types: (not included-order separately-please check one)

☐ Fixture Wall Actuator (HY-33-A) (rear access required)


☐ MBPM - Metal Button Panel Mount (HY-108-A)

See Actuator Specification pages for details on Actuators.

☐ MP - Metal Partition Actuator (HY-49-A)

☐ MBFW - Metal Button Fixture Wall Actuator (HY-100-A) (rear access required)

☐ SW - Side Wall Mounted Actuator (HY-72-A)

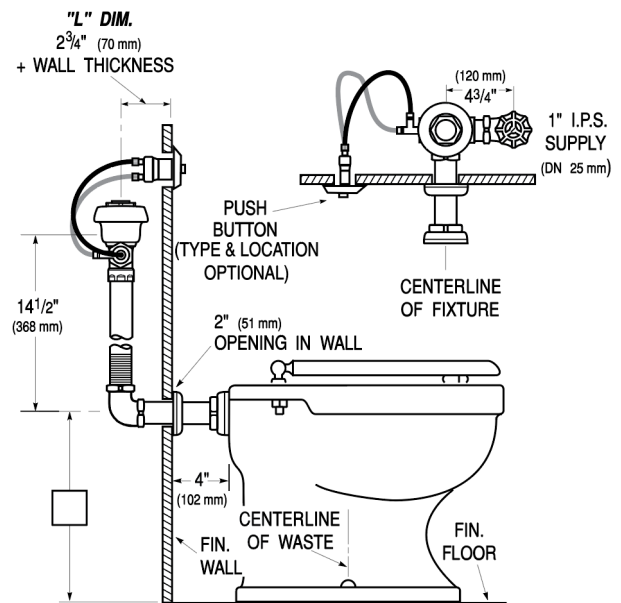

► Compliance & Certifications



This space for Architect/Engineer Approval