

► Code Number

12001001

► Description

Complete system with exposed manual Royal® HEU urinal Flushometer and vitreous china retrofit urinal.

► Flush Cycle

Model WEUS.1200.1001-0.125 (0.125 gpf/0.5 Lpf)

► SPECIFICATIONS


Quiet,exposed diaphragm type, chrome plated urinal Flushometer and vitreous china retrofit urinal with the following features

Flushometer Specification

- Quiet, diaphragm type, chrome plated closet Flushometer and vitreous china water closet with the following features:
- Non-Hold-Open Operation
- Flex Tube Dual Filtered Bypass Diaphragm designed for improved life and reduced maintenance
- ADA compliant Solis solar powered infrared sensor for automatic "Hands-free" operation
- Infrared Sensor with Multiple-focused, Lobular Sensing Fields for high and low target detection
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Flush accuracy controlled by CID® technology
- Diaphragm, Stop Seat and Vacuum Breaker molded from PERMEX® rubber compound for chloramine resistance
- Free spinning Vandal Resistant Stop Cap and Adjustable Tailpiece
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange w/Set Screw
- Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037/ ASME A112.19.2/CSA B45.1
- 3/4" I.P.S. Screwdriver Bak-chek® angle Stop
- Spud coupling and flange for 3/4" top Spud

Urinal Fixture

- Wall hung vitreous rear spud china
- Large footprint to cover old caulk lines
- Washdown flushing action
- 3/4" I.P.S. rear spud inlet
- Vandal resistant strainer assembly included
- 2" NPT outlet flange
- All mounting hardware included
- Integral flushing rim
- 100% factory flush tested
- Compliant to the applicable sections of ASME A112.19.2/CSA B45.1
- Carrier not included

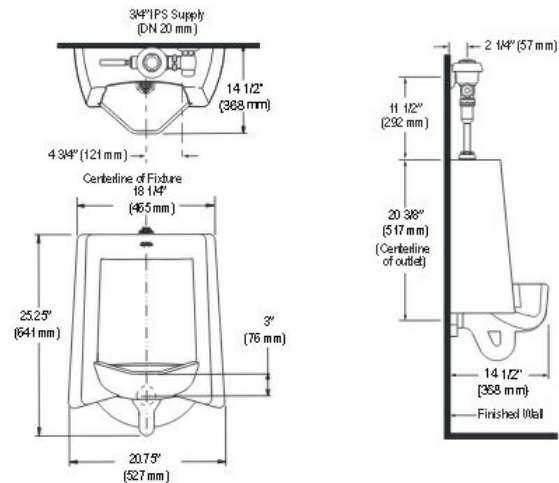

► NOTE

- Plumbing System Requirements
- Minimum Flowing Pressure: 25 PSI / Minimum Flow Rate: 18 GPM / Maximum Fixture Static Pressure: 80 PSI

► Compliance & Certifications



ASME A112.1.3

NOTE: All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

This space for Architect/Engineer Approval