

► Code Number

3912503

► Description

Exposed Urinal Flushometer with Adjustable Ground Joint Tailpiece, for ¾" top spud urinals.

► Flush Cycle

- 0.5 gpf/1.9 Lpf

► Specifications

The Flushometer replaces existing valves that incorporate Ground Joint Tailpiece connections without having to replace the supply Control Stop.

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Adjustable Ground Joint Tailpiece (control stop not included)
- Spud Coupling and Flange for ¾" Top Spud
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Flush accuracy controlled by CID® technology
- Spud Coupling and Flange for 1 1/2" Top Spud

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.



► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories

► Variations

For Flushometer with Control Stop (includes Sweat Solder Adapter and Supply Flange), delete "XD" from the Model Number.

Retrofit Installations may require specialized Valve Rough-ins. Consult Sloan Valve Company Installation Engineering Department for assistance.

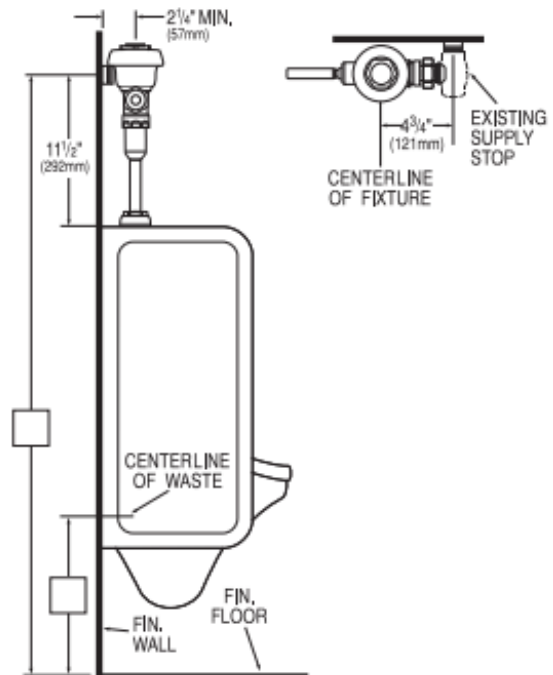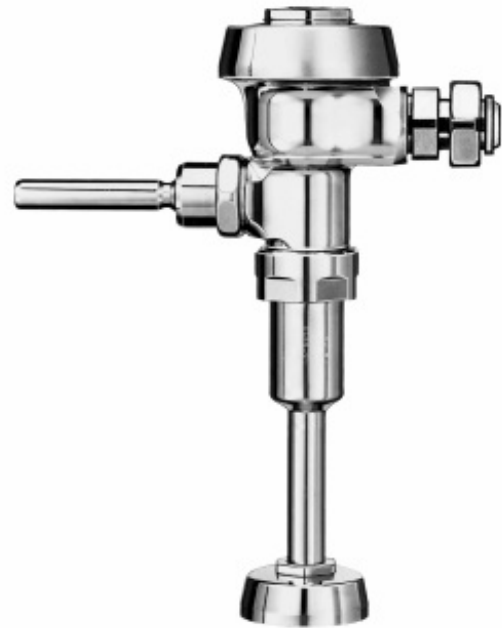

► Compliance & Certifications



This space for Architect/Engineer Approval