

► Code Number

10001007

► Description

Complete HEU system with exposed manual GEM® urinal Flushometer and vitreous china urinal fixture.

► Flush Cycle

0.125 gpf/0.5 Lpf

► Flushometer Specification


- Fixed Volume Piston with Dual Filtered O-ring
- Non-Hold-Open Operation
- Spud Coupling and flange for 3/4" Top Spud
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with free spinning, vandal resistant Stop Cap
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange with Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Handle Packing, Stop Seat and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037/ ASME A112.19.2/CSA B45.1

► Fixture Specifications

- Wall hung vitreous china with Integral flushing rim
- Washdown flushing action
- Vandal resistant strainer assembly included
- 3/4" I.P.S. top spud inlet
- 2" NPT outlet flange
- All mounting hardware included
- Compliant with Buy American Act when purchased as a combination
- Carrier not included
- 100% factory flush tested
- Complies to the applicable sections of: ANSI/ASME A112.19.2 and CSA B45.1

► Plumbing System Requirements

- Maximum Static Pressure: 80 PSI
- Minimum Flow Rate: 18 GPM
- Minimum Flowing Pressure: 25 PSI

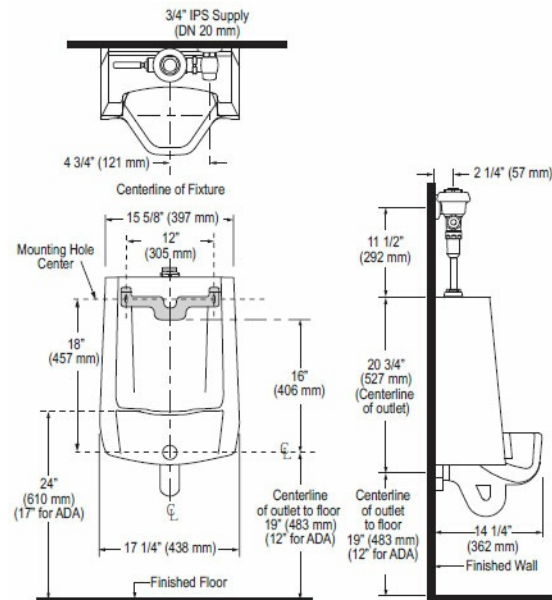

► Compliance & Certifications

CEC Compliant



This space for Architect/Engineer Approval