

► Code Number:

20101030

► Description

Complete HET system with concealed manual Royal® closet Flushometer and ADA compliant vitreous china floor mounted water closet.

► Flush Cycle

1.28 gpf/4.8 Lpf

► Specifications


Quiet, concealed, diaphragm type, chrome plated closet Flushometer and vitreous china water closet with the following features:

► Flushometer Specification

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Metal oscillating Non-Hold-Open Handle with Triple Seal Handle Packing
- Elbow Flush Connection
- Exposed Parts Chrome Plated
- High Back Pressure Vacuum Breaker Flush Connection with One-piece Bottom Hex Coupling Nut
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Flush accuracy controlled by CID® technology
- 1" I.P.S. screwdriver Bak-Chek® angle stop
- Diaphragm, handle packing, stop seat and vacuum breaker molded from PERMEX rubber compound for chloramine resistance
- High copper, low zinc brass castings for dezincification resistance
- Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037/ ASME A112.19.2/CSA B45.1

► Fixture Specification

- Floor Mounted Vitreous China Elongated Bowl
- 2" fully glazed trapway diameter
- Integral flushing rim
- Siphon jet flush
- Closet bolts and caps included
- 100% factory flush tested
- Toilet seat not included
- Recommended seats: Bemis - 1955CT/1955SST & 2155CT/2155SST Church - 295CT/295SST & 2155CT/2155SST
- Water closet shall be in compliance to the applicable sections of ASME A112.19.2/CSA B45.1
- Compliant with Buy American Act when purchased as a combination
- 1 1/2" I.P.S. rear spud inlet

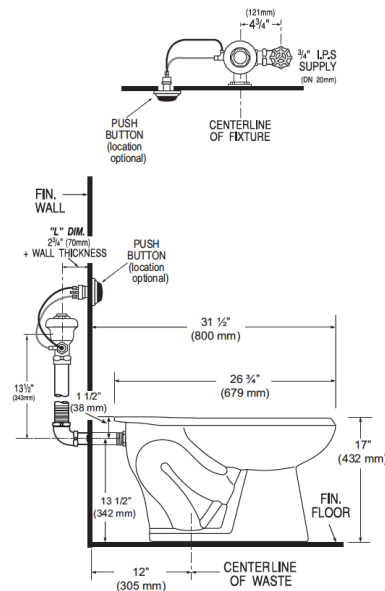

All vitreous china dimensions shown in these drawings are nominal. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. Please take this into consideration when planning rough-in and plumbing layouts.

► Plumbing System Requirements

Maximum Fixture Static Pressure: 80 PSI

Minimum Flow Rate: 18 GPM

Minimum Flowing Pressure: 25 PSI

► Compliance & Certifications



This space for Architect/Engineer Approval