

# MANIFOLD – ASTM F1960 PEX GRIP™

» 672 SERIES

PowerPEX® BranchMaster™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

## SPECIFICATION

Sioux Chief ASTM F1960 BranchMaster™ manifolds shall be used in plumbing or heating systems for safe distribution of hot or cold water to supply fixtures and shall be used in standard plumbing practices. Manifolds shall be used in new construction or remodel applications, utilized in various design configurations. Manifolds shall be offered with or without valves with various outlet multiples. Each manifold shall be manufactured with no lead solder or braze and tested by Sioux Chief prior to shipment.

## INSTALLATION

Hot water manifolds should be located within the first six feet after a water heater to aid in hot water delivery times. Recirculation lines should be run into an independent fitting and not directly into the manifold.

## MATERIALS

**Trunk:** Type L copper

**End outlet:** copper or C69300\* brass

**Branch:** C69300\* brass

**Solder:** No Lead

\*693 brass used in brazed configurations


## CERTIFICATIONS

NSF-372 compliant, IAPMO listed

Note: connection specifications are limited to those called out in their respective ASTM standards for pipe and fittings.



672WG0440

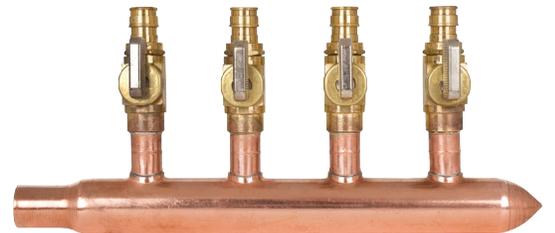

672WW0430



Made in U.S.A.

### Create Item Number

## 672WABC

e.g. **672WG03C0**: 1" L copper trunk, three 1/2" ASTM F1960 no lead branches, 1" CPVC inlet x spun closed

### MANIFOLD TYPE A

**G** = 1/2" F1960 no lead branch

**V** = 1/2" F1960 valve branch

### BRANCH MULTIPLES B

**02** = 2 branches

**03** = 3 branches

**04** = 4 branches

**06** = 6 branches

**08** = 8 branches

**10** = 10 branches

**12** = 12 branches

**13** = 13 branches

### TRUNK TYPE C

**30** = 1" L, 3/4" male sweat x spun closed

**33** = 1" L, 3/4" male sweat x 3/4" male sweat

**40** = 1" L, 1" male sweat x spun closed

**44** = 1" L, 1" male sweat x 1" male sweat

**C0** = 1" L, 1" CPVC x spun closed

Additional options available at [www.siouxchief.com](http://www.siouxchief.com).