

► Code Number

3143081

► Description

Concealed Urinal Flushometer for 1 1/4" back spud urinals. Especially suited for harsh water conditions.

► Flush Cycle

1.0 gpf/3.8 Lpf

Valve Adjustment Range: 0.5 gpf/1.7 Lpf to 3.0 gpf/11.4 Lpf

► Specifications

Quiet, Concealed, Adjustable Piston Type, Rough Brass Urinal Flushometer with the following features:

- Exposed Parts Chrome Plated
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Vacuum Breaker Flush Connection
- Self-cleaning Xpelor® Bypass
- Ultra High Copper, Low Zinc Brass Castings for Dezincification and Salt Water Resistance
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX® Rubber Compound for Chloramine Resistance
- Double Slip Elbow Flush Connection and Spud Coupling for 1 1/4" Concealed Back Spud"
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop

Valve Body, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037, ANSI/ASME A112.19.2

► Variations


8 3/4 LDIM

► L Dimension

Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2 3/4" (70 mm).

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories

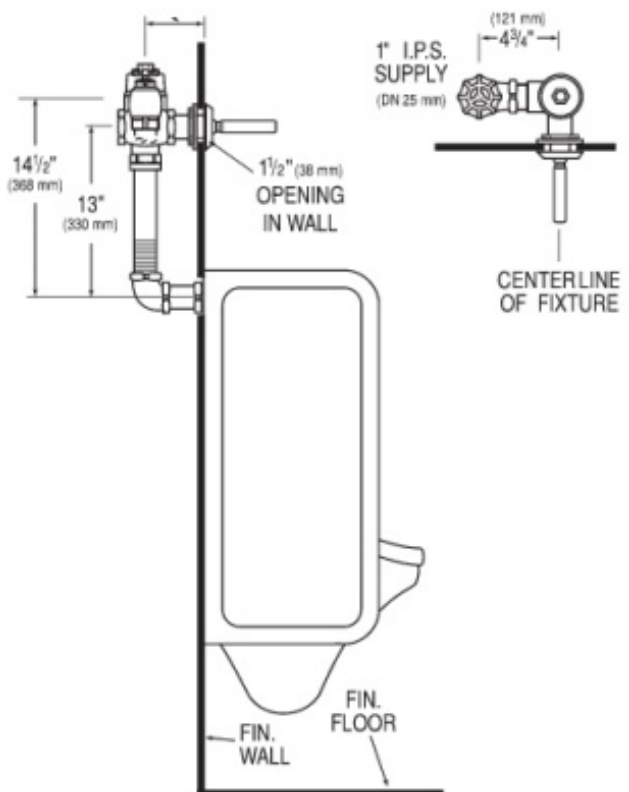

► Compliance & Certifications



This space for Architect/Engineer Approval