

► Code Number

3910169

► Description

Exposed Water Closet Flushometer, for top inlet squat toilets.

► Flush Cycle

☐ Model 136-1.6 Low Consumption (1.6 gpf/6.0 Lpf)

► Specifications



Quiet, Exposed, Diaphragm Type, Chrome Plated Closet Flushometer with the following features:

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- ADA Compliant Metal Oscillating Non-Hold-Open Handle with Triple Seal Handle Packing
- 1" I.P.S. Screwdriver Bak-Chek® Stop with free spinning vandal resistant stop cap
- Free Spinning Vandal Resistant Stop Cap
- Trap Primer
- Spud Coupling and Flange for 1 1/2" Top Spud
- Spud Coupling and Flange for 1 1/2" Top Spud
- Sweat Solder Adapter with Cover Tube & Cast Wall Flange with Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID Technology
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

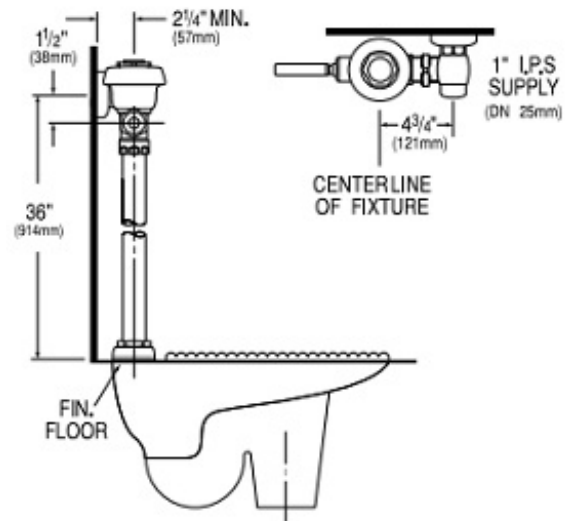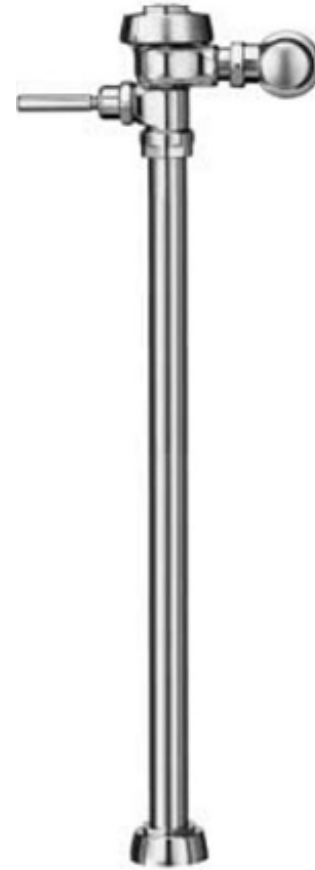

► Compliance & Certifications



IAPMO cUPC

This space for Architect/Engineer Approval