

► **Code Number**
2172459

► **Description**
Vitreous china wall hung water closet.

► **Flush Cycle**

- Flush volume is determined by the flushometer used with fixture
- 1.1 to 1.6 gpf/4.2 to 6.0 Lpf

► **Fixture Specification**

- White Vitreous china
- Permanent SloanTec™ hydrophobic antimicrobial glaze inhibits the growth and buildup of germs, bacteria, mold, mildew and mineral scale on the surfaces
- Siphon jet flushing action achieves 1000g Map score when used with any Sloan flushometer
- Wall hung, wall outlet
- Siphon jet flushing action
- Integral flushing rim
- Elongated bowl
- Water spot area 11 1/4" x 8 1/2"
- Toilet seat not included
- 1 1/2" I.P.S. rear spud inlet
- 2 1/8" fully glazed trapway diameter

Recommended Seats

- Bemis - 1955CT/1955SSCT & 2155CT/2155SSCT
- Church - 295CT/295SSCT & 2155CT/2155SSCT

► **Plumbing System Requirements**



- Maximum Static Pressure: 80 PSI
- Minimum Flowing Pressure: 25 PSI
- Minimum Flow Rate: 25 GPM

► **Product Specification**

- Elongated water closet shall be made of vitreous china with SloanTec Glaze with a 1-1/2" top spud. Bowl shall be ADA compliant. Water Closet shall be wall hung. Water closet shall be Sloan Model ST-2459.

► **Notes**

- This model meets the requirements for a High Efficiency Toilet when used with a high efficiency flushometer (1.28 gpf/4.8 Lpf or 1.1/1.6 gpf-4.2/6.0 Lpf dual-flush).
- All information contained in this document subject to change without written notice
- All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

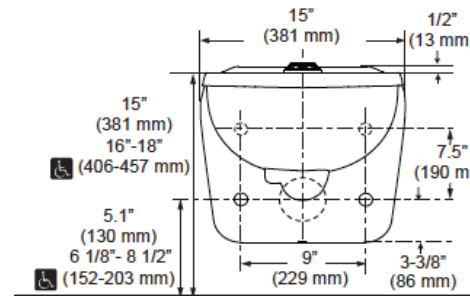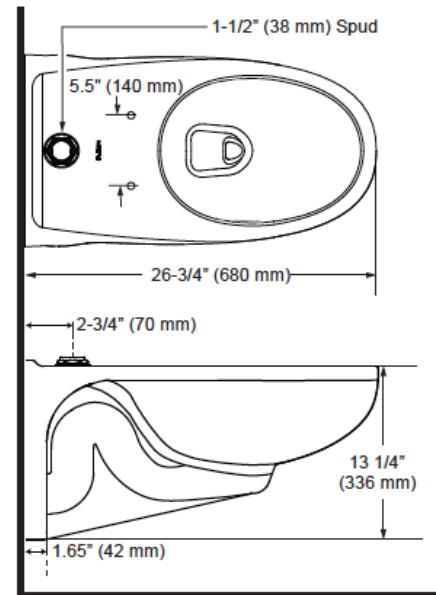

► **Compliance & Certifications**



This space for Architect/Engineer Approval