

# Act-O-Matic® Shower Head

# AC-51



## ► Description

Act-O-Matic®, Chrome Plated, Self-cleaning Shower Head.

## ► Flow Rate

□ 2.5 gpm/9.4 Lpm maximum

## ► Specifications

Act-O-Matic®, Chrome Plated Shower Head with the following features:

- Spring loaded, Self-cleaning Spray Disk to prevent particle clogging
- "Cone-within-a-cone" Spray Pattern for total body coverage
- Pressure Compensating 2.5 gpm/9.4 Lpm Flow Control
- All Brass Construction
- Universal Ball Joint
- ½" I.P.S. Inlet

Shower Head shall be in conformance to all requirements of ANSI/ASME Standard A112.18.1M, CSA B-125 and the United States Federal Energy Policy Act.


## ► Finishes

- |                             |                |
|-----------------------------|----------------|
| <input type="checkbox"/> PB | Polished Brass |
| <input type="checkbox"/> BN | Brushed Nickel |
| <input type="checkbox"/> SF | Satin Finish   |

Note: Shower Head Available with ½" Whitworth Thread (please specify).

See Accessories Section of the Sloan Catalog for details on these and other Shower Head variations.

½" (DN 15 mm) NPT

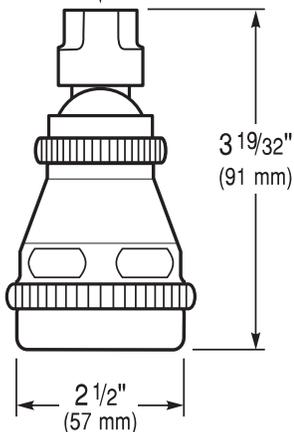

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

## SLOAN®

Made in the U.S.A.

SLOAN VALVE COMPANY • 10500 SEYMOUR AVE. • FRANKLIN PARK, IL. 60131  
Ph: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380  
www.sloanvalve.com