

► Code Number

3324056

► Description

Battery powered, infrared, sensor activated, electronic, chrome plated die cast body, hand washing faucet for pre-tempered or hot and cold water operation.

► Flow Rates

1.5 gpm / 5.7 Lpm – Spray Head

► Specifications

Battery Powered, Sensor Activated, Electronic, Chrome Plated Die Cast Body, Hand Washing Faucet with the following features:

One tool service

All wetted components to be stainless steel, engineered thermoplastic, EPDM, and copper or copper alloy

Solenoid housed in removable carrier that includes supply strainer

Supply strainer serviceable from above deck

Vandal resistant spray insert, key housed inside faucet body

All electronics sealed to IP-67

Gold plated electrical contacts

Above deck individual diagnostic indicators for battery life, solenoid condition, and power up mode

Double infrared sensors with automatic setting feature

Includes all mounting hardware

Line purge mode, eliminates stagnant water

High temperature auto shut-off (LCD models)

Faucet can be configured to add solar and/or LCD display

Integral above deck water supply shut off

Thermostatic, below deck for ASSE 1070 compliance, optional

Above deck solenoid valve

Adjustable time-outs and sleep/cleaning mode

LCD display of water temperature and scrub time, optional

One (1) CR-P2 battery

Optional Wall Flange included

Sleep/cleaning Mode

Bi-stable Magnetic Solenoid Valve

► Variations

NPT 1/2

Battery Type Lithium

► Control Circuit

6.75 VDC

► Battery Life

5-years under worst case conditions of 8,000 cycles per month and high water pressure. Optional power harvesting may extend service life of batteries to equal the shelf life.

► DIMENSIONS


► Solenoid Valve

Filtered Solenoid Valve with Serviceable Strainer Filter

► Sensor Range

Nominal: 4" - 5" (102 mm - 127 mm)

Faucet Adaptive Self-Adjustment Range: 1"-6" (25 mm-150 mm)

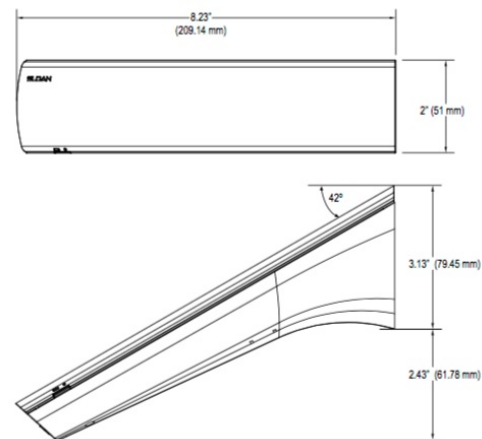

► BASYS Spec Language

Sloan BASYS Model No. EFX-850._____. Infrared Sensor Activated Electronic Handwashing Faucet for pre-tempered supplies. Solenoid valve housed in removable carrier that closes water supply upon removal, eliminating need to access control stops. Solenoid carrier includes mesh filter for easy access and service without disconnecting the supply lines. Thermostatic mixer ordered separately to comply with ASSE 1070 requirements. The product shall be tested and certified to industry standards: ASME A112.18.1M, CSA B125.1, California Health and Safety Code 116875 (AB1953-2006), and Vermont Bill S.152. This product meets ADA ANSI/ICC A117.1 requirements.

► Model Creation Guide

EFX-850.	X	0	X	.	1	0	0	0	.	X
	Mix	Sensing	Flow Rate		Battery Type	Base Plate	Voltage Adapters	Drain Pop-Up		Finishes
0	☐ None	Active IR	☐ 0.5 gpm Multi-Lam	.	—	No	None	No	.	☐ CP
1	☐ Below Deck, Mechanical	—	—	.	Lithium	—	—	—	.	☐ PVDSF
2	☐ Below Deck, Thermostatic	—	☐ 1.5 gpm Aerated & Laminar	.	—	—	—	—	.	—

This space for Architect/Engineer Approval

► Time Out Setting

30 seconds — Maximum time faucet will run upon continuous detection

► Can combine up to six (6) faucets on one voltage adapter

► Power Supplies

6 VDC Solar Energy Module with 50/60 Hz, 6 VDC Lithium Battery Pack

120 VAC/6.75 VDC Voltage Adapter (Option) Batteries Act as Backup Shown with EFX-800.000.1000

► Accessories (ordered separately)

Splitter (included in hardwire less adapter)

126" Extension Cable

11 13/16" Extension Cable

47 1/4" Extension Cable

► OPERATION

1. A continuous, invisible light beam is emitted from the sensor located at the front of the hand washing faucet.
2. As the user's hands enter the beam's effective range, the beam is reflected back into the sensor receiver and activates the solenoid valve allowing water to flow from the faucet. Water will flow until the hands are no longer sensed or until the faucet reaches its automatic time out limit setting.
3. When hands are moved away from the sensor, the loss of reflected light initiates an electrical signal that closes the solenoid valve shutting off the water flow. The circuit then automatically resets and is ready for the next user.




► ROUGH-IN

EFX-850.X0X.10X0 Faucet with Vessel Sink

NOTE: PLUMBING CONNECTIONS NOT SUPPLIED

NOTE: INSTALL IN ACCORDANCE WITH LOCAL PLUMBING CODES

EFX-850.X0X.10X0 Faucet with Vessel Sink

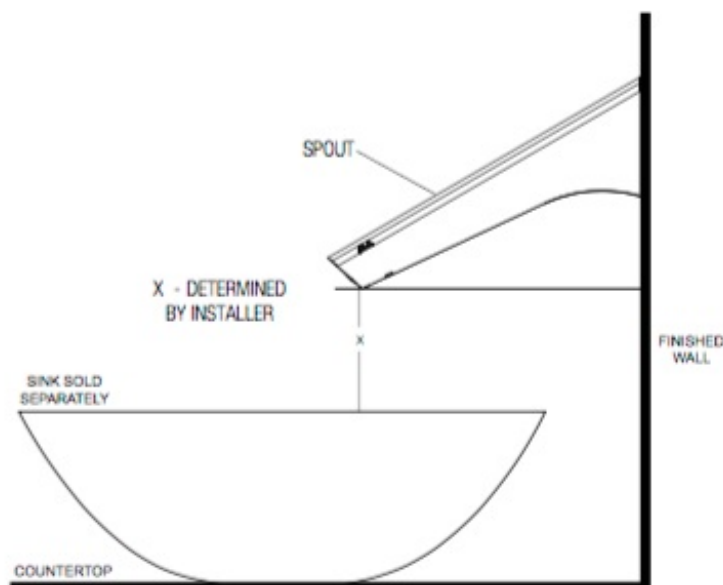

NOTE: PLUMBING CONNECTIONS NOT SUPPLIED

NOTE: INSTALL IN ACCORDANCE WITH LOCAL PLUMBING CODES