

► **Code Number**
3012672

► **Description**

Exposed high-efficiency urinal Flushometer, for 3/4" top spud high-efficiency urinals. For installations where reclaimed or recycled water is used for flushing.

► **Flush Cycle**

0.125 gpf/0.5 Lpf

► **Specifications**

Quiet, Exposed, Diaphragm Type, Chrome Plated Urinal Flushometer with the following features:

- Sweat Solder Adapter with Cover Tube & Cast Wall Flange with Set Screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- Dual Filtered Bypass Diaphragm
- Spud Coupling and Flange for 3/4" Top Spud
- Features purple wall flange, diaphragm guide, bonnet and inner cover to communicate reclaimed water use
- Includes adhesive backed metal wallplate with non-potable water warning

1 1/2" Offset Flush Tube

- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Flush accuracy controlled by CID® technology
- Spud Coupling and Flange for 1 1/2" Top Spud
- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop

► **Special Finishes**

Polished Brass (PVD Finish)

Brushed Nickel (PVD Finish)

Brushed Stainless (PVD finish)


► **Fixtures**

Consult factory for matching Sloan brand fixture options.

► **Accessories (ordered separately)**

Purple Handle

See Accessories Section of the Sloan catalog for available accessories

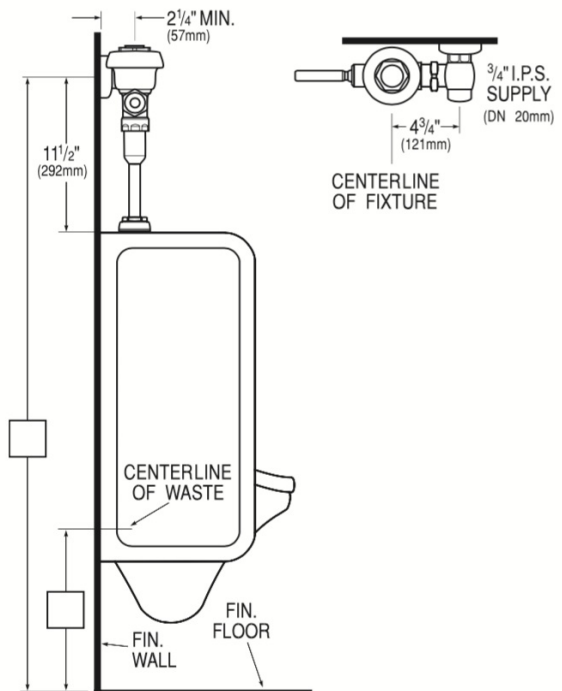

► **Compliance & Certifications**



Made In The
USA



This space for Architect/Engineer Approval