

### ► Code Number

3782678

### ► Description

Exposed Urinal Flushometer for 3/4" top spud urinals.

### ► Flush Cycle

0.125 gpf/0.5 Lpf

### ► Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated High Efficiency Urinal Flushometer with the following features:

- PERMEX® Synthetic Rubber Diaphragm with Dual Bypass
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Vacuum Breaker with Flush Connection
- Spud Coupling and Spud Flange for 3/4" Top Spud
- Sweat Solder Adapter with Cover Tube and Cast Wall Flange
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- High Efficiency flush accuracy
- Diaphragm, Handle Packing and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

### ► Variations

DBP - Dual-Bypass Diaphragm

Less Logo

### ► Accessories (Sold Separately)


See Accessories Section of the Sloan catalog for available accessories

### ► Fixtures

Consult factory for matching Sloan brand fixture options.

### ► Disclaimer

All information contained within this document subject to change without notice.

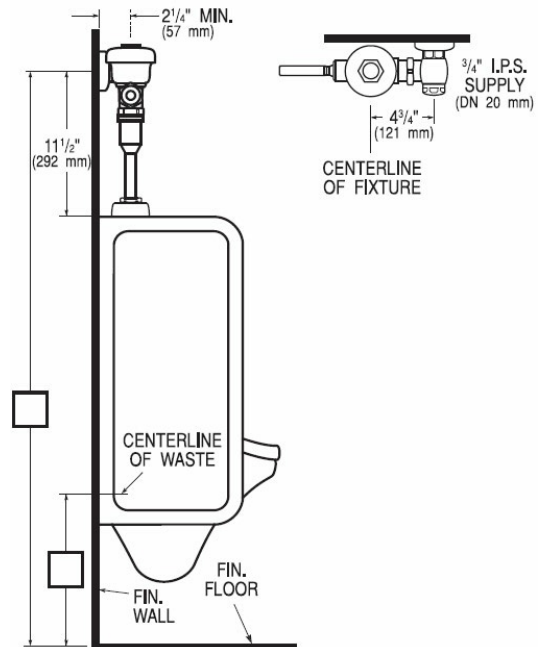

### ► Compliance & Certifications

Made In The  
**USA**



This space for Architect/Engineer Approval