

► Code Number

3915405

► Description

Concealed Hydraulically Operated Urinal Flushometer, for 1 1/4" top spud urinals

► Flush Cycle

Model 992-1.5 Water Saver (1.5 gpf/5.7 Lpf)

► Specifications

Quiet, Concealed, Diaphragm Type, Rough Brass Urinal Flushometer for either left or right hand supply with the following features:

- Low Consumption flush accuracy controlled by Para-Flo™ Technology
- ADA Compliant Non-Hold-Open Actuator
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Trap Primer
- Valve designed to accept Low and Ultra-Low Consumption Pistons only to ensure Water Conservation
- Double Slip Elbow Flush Connection and Spud Coupling for 1 1/4" Concealed Back Spud"
- Chrome Plated Exposed Flushometer Parts
- Diaphragm, Handle Packing, Stop Seat and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance.
- Exposed Parts Chrome Plated

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.

► L Dimension

Specify the "L" Dimension for the proper length of the Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2 3/4".

► Actuator Types: (not included-order separately-please check one)

- Fixture Wall Actuator (HY-33-A) (rear access required)
- Metal Partition Actuator (HY-49-A)
- Side Wall Mounted Actuator (HY-72-A)
- Metal Button Fixture Wall Actuator (HY-100-A) (rear access required)
- MBPM - Metal Button Panel Mount (HY-108-A)


See Actuator Specification pages for details on Actuators.

► Variations

1 1/2" Flush Connection"

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

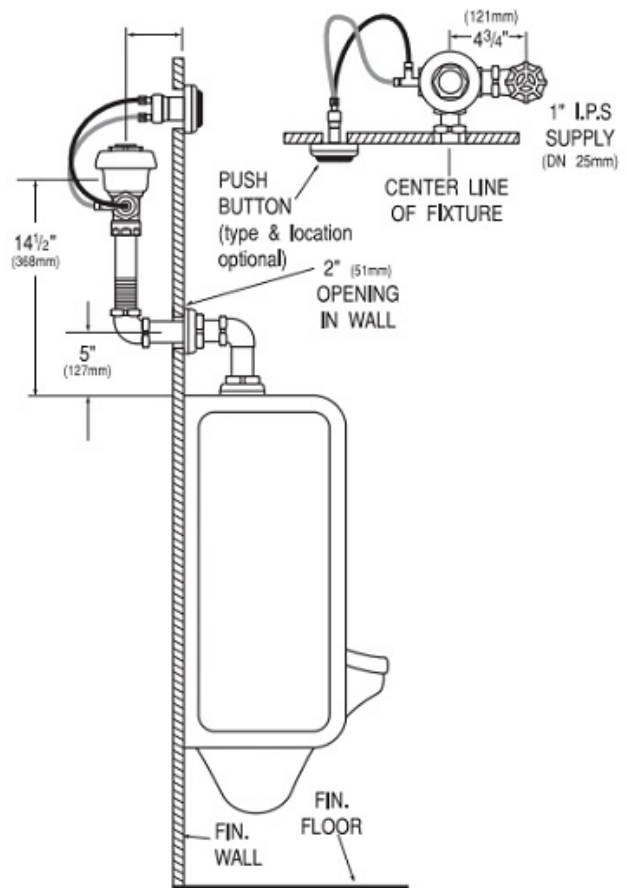

► Compliance & Certifications



This space for Architect/Engineer Approval



**Hydraulic (900 Series)
Flushometers
992-1.5**
