

► Code Number

3013400

► Description

Concealed Hydraulically Operated Water Closet Flushometer, for floor mounted back spud bowls.

► Flush Cycle

Model 940 Water Saver (3.5 gpf/13.2 Lpf)

► Specifications

Quiet, Concealed, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- ADA Compliant Non-Hold-Open feature type Actuator (not included, order separately-specify Actuator type listed below)
- Chrome Plated Exposed Flushometer Parts
- Vacuum Breaker Flush Connection
- ADA Compliant Non-Hold-Open Actuator
- Flush Accuracy Controlled by CID Technology
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- Double Slip Elbow Flush Connection for 1½" Exposed Back Spud
- Spud Coupling, Wall and Spud Flanges

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.


► L Dimension

Specify the "L" Dimension for the proper length of the Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾".

► Actuator Types: (not included-order separately-please check one)

- ☐ Fixture Wall Actuator (HY-33-A) (rear access required)
- ☐ Metal Partition Actuator (HY-49-A)
- ☐ Side Wall Mounted Actuator (HY-72-A)
- ☐ Metal Button Fixture Wall Actuator (HY-100-A) (rear access required)
- ☐ MBPM - Metal Button Panel Mount (HY-108-A)

See Actuator Specification pages for details on Actuators.

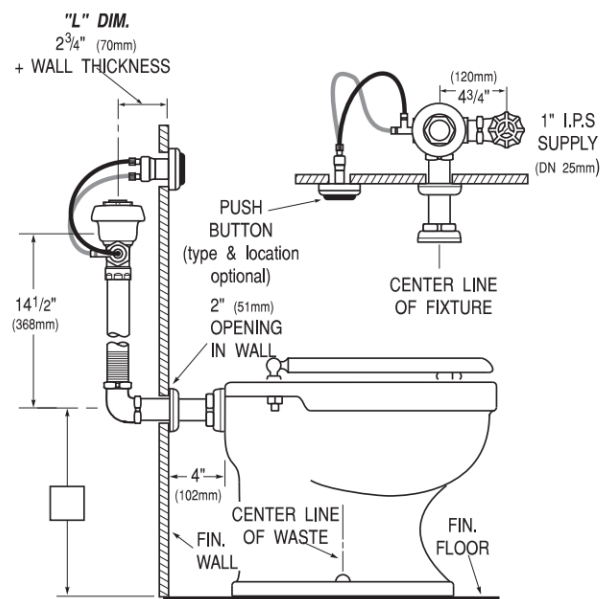

► Compliance & Certifications



This space for Architect/Engineer Approval