

### ► Code Number

3011413

### ► Description

Concealed Water Closet Flushometer, for wall hung back spud bowls.

### ► Flush Cycle

3.5 gpf/13.2 lpf

### ► Specifications

Quiet, Concealed, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Vacuum Breaker
- Spud Coupling for 1½" Concealed Back Spud
- Elbow Flush Connection
- Exposed Parts Chrome Plated
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Flush accuracy controlled by CID® technology

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

### ► L Dimension

Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾" (70 mm).

3 3/4 inch LDIM

### ► Variations


3" Metal Oscillating Push Button

### ► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories



Model Royal 144 Shown

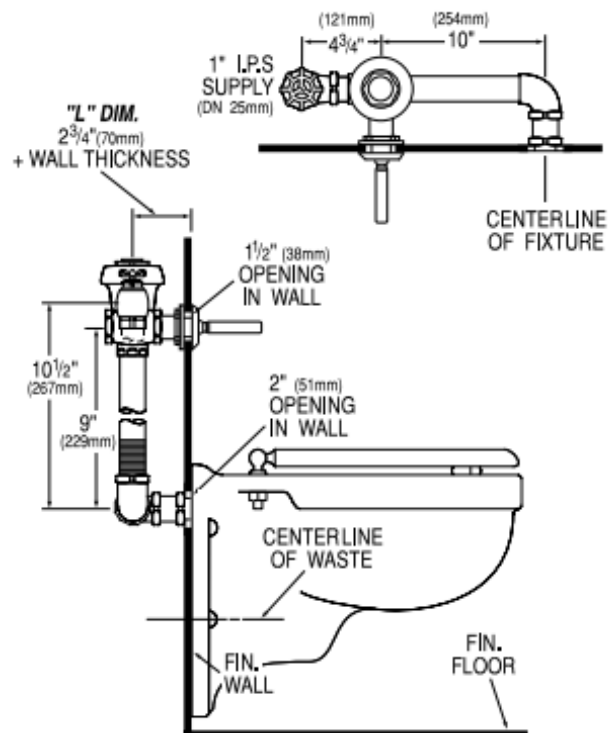

Model Royal 144 Shown

### ► Compliance & Certifications



Made In The  
**USA**



This space for Architect/Engineer Approval