

► Code Number

3520015

► Description

Concealed Water Closet Flushometer, for floor mounted or wall hung top spud bowls.

► Flush Cycle

1.28 gpf/4.8 Lpf

► Specifications

Quiet, concealed piston type manual flushometer with the following features:

- Metal Direct Acting, Non-Hold-Open Push Button with Triple Seal Handle Packing
- Self-cleaning Xpelor® Bypass
- Vacuum Breaker
- Chrome Plated Exposed Flushometer Parts
- Elbow Flush Connection, Spud Coupling, Wall and Spud Flanges for 1 1/2" Exposed Top Spud
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Low Consumption Flush Accuracy
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX® Rubber Compound for Chloramine Resistance
- Fixed Volume Piston with Filtered O-ring Bypass

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

► Variations

10 3/4 LDIM

L - Metal Index Push Button

E - Straight Stop Variation


11 1/2" Vacuum Breaker

► L Dimension

Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2 3/4" (70 mm).

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories

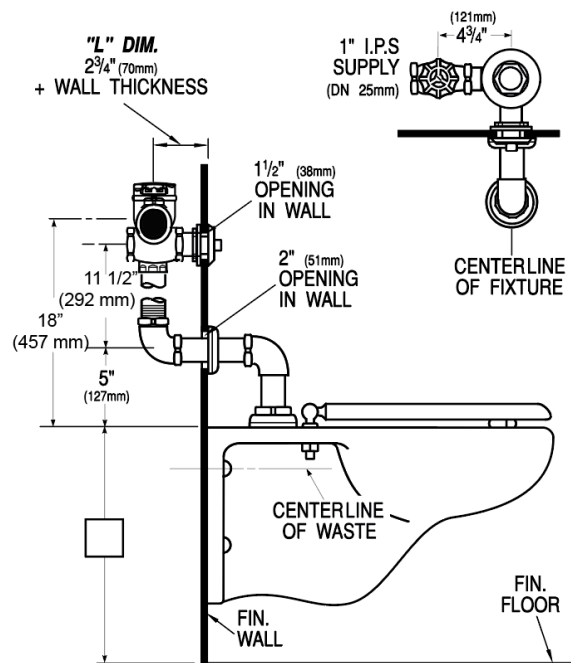

► Compliance & Certifications



Made In The
USA



This space for Architect/Engineer Approval