

► Code Number

3784820

► Description

Concealed Hydraulically Operated Sloan® Water Closet Flushometer for floor mounted back spud bowls.

► Flush Cycle

1.6 gpf/6.0Lpf

► Specifications

Quiet, Concealed, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- ADA Compliant Non-Hold-Open Actuator
- Exposed Parts Chrome Plated
- Sweat Solder Adapter with Cover Tube
- Vacuum Breaker Flush Connection
- Spud Coupling, Wall and Spud Flanges
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation.
- Double Slip Elbow Flush Connection for 1½" Exposed Back Spud
- Stop Seat and Vacuum Breaker to be molded from PERMEX™ Rubber Compound for Chloramine Resistance.
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

► Variations

2-10 3/4 LDIM

► L Dimension

Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾" (70 mm).

► Actuator Types: (not included-order separately-please check one)


- ☐ Fixture Wall Actuator (HY-33-A) (rear access required)
- ☐ MBPM - Metal Button Panel Mount (HY-108-A)
- ☐ MP - Metal Partition Actuator (HY-49-A)
- ☐ MBFW - Metal Button Fixture Wall Actuator (HY-100-A) (rear access required)
- ☐ SW - Side Wall Mounted Actuator (HY-72-A)

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories

► Fixtures

Consult factory for matching Sloan brand fixture options.

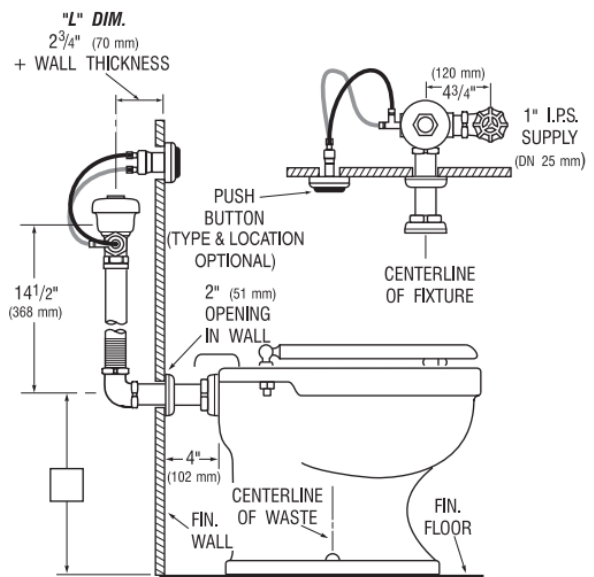

► Compliance & Certifications



This space for Architect/Engineer Approval