

### ► Code Number

3983402

### ► Description

Concealed Hydraulically Operated Regal® XL Water Closet Flushometer for floor mounted back spud bowls.

### ► Flush Cycle

1.6 gpf / 6 lpf

### ► Specifications

Quiet, Concealed, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- ADA Compliant Non-Hold-Open Actuator
- Trap Primer
- Exposed Parts Chrome Plated
- Sweat Solder Adapter with Cover Tube
- Vacuum Breaker Flush Connection
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Spud Coupling, Wall and Spud Flanges
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation.
- "Double Slip Elbow Flush Connection for 1½" Exposed Back Spud"
- Low Consumption flush accuracy controlled by Para-Flo™ Inside Parts Kit
- Stop Seat and Vacuum Breaker to be molded from PERMEX™ Rubber Compound for Chloramine Resistance.

Valve Body, Cover and Tailpiece shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

### ► L Dimension

Specify the "L" Dimension for the proper length of the Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾".

### ► Actuator Types: (not included-order separately-please check one)

- Fixture Wall Actuator (HY-33-A) (rear access required)
- Metal Partition Actuator (HY-49-A)
- Side Wall Mounted Actuator (HY-72-A)
- Metal Button Fixture Wall Actuator (HY-100-A) (rear access required)
- MBPM - Metal Button Panel Mount (HY-108-A)

### ► Variations


- YI Two Wall Bumpers (for open front seat without cover)
- Trap Primer Elbow

### ► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

### ► Fixtures

Consult factory for matching Sloan brand fixture options.

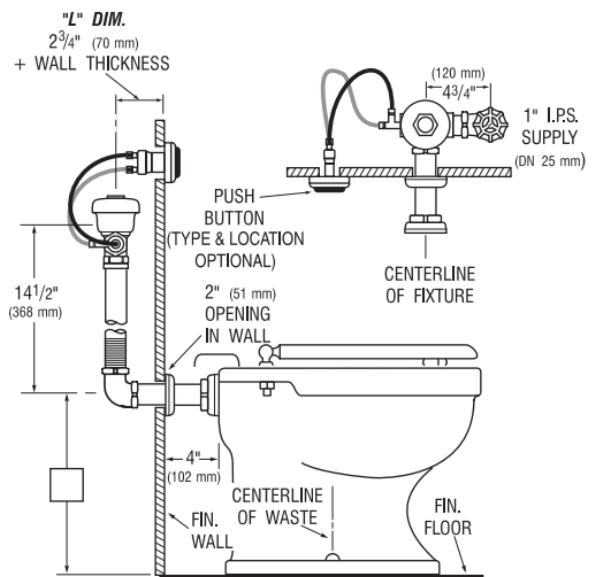

### ► Compliance & Certifications



This space for Architect/Engineer Approval