

► Code Number

3781700

► Description

Concealed Water Closet Flushometer, for floor mounted or wall hung top spud bowls.

► Flush Cycle

1.6 gpf/6.0 Lpf

► Specifications

Quiet, Concealed, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- Metal Direct Acting, Non-Hold-Open Push Button with Triple Seal Handle Packing
- High Chloramine Resistant PERMEX® Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing Action™
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Vacuum Breaker
- Adjustable Tailpiece
- Chrome Plated Exposed Flushometer Parts
- Elbow Flush Connection, Spud Coupling, Wall and Spud Flanges for 1½" Exposed Top Spud
- Exposed Parts Chrome Plated
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Low Consumption Flush Accuracy
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.

► Variations

10 3/4 LDIM


DFB Dual-Filtered Bypass Diaphragm

► L Dimension

Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾" (70 mm).

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

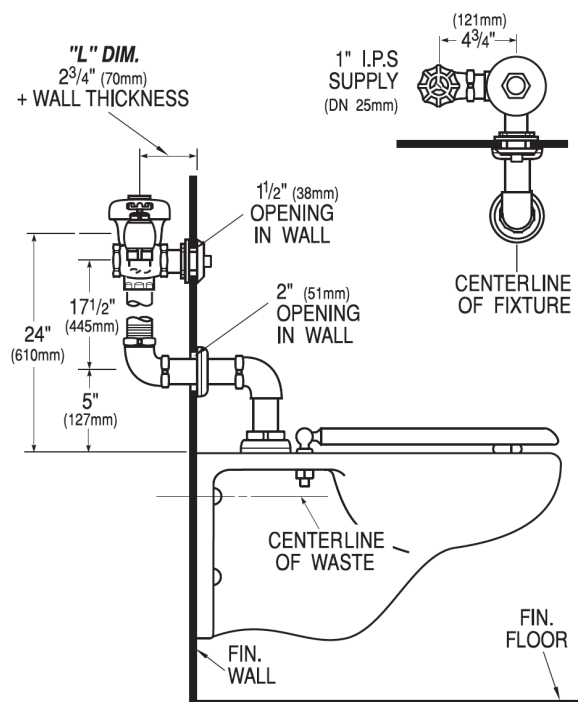

► Compliance & Certifications



Made In The
USA



This space for Architect/Engineer Approval