

► Code Number

3052600

► Description

Exposed Urinal Flushometer, for ¾" top spud urinals. Specifically engineered for salt water and severe water conditions.

► Flush Cycle

1.0 gpf/5.7 Lpf

► Specifications

Quiet, Exposed, Chrome Plated Urinal Flushometer with the following features:

- Metal Lever Handle
- ¾" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Vacuum Breaker Flush Connection
- Spud Coupling and Flange for ¾" Top Spud
- Flushometer does not require water pressure to positively shut off
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX® Rubber Compound for Chloramine Resistance



Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

► NOTE

Valve Adjustment Range: 0.25 gpf/0.9 Lpf to 12.0 gpf/45.4 Lpf
Factory settings made at 40 psi (275 kPa) — flush volume will vary with pressure and flow rate

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

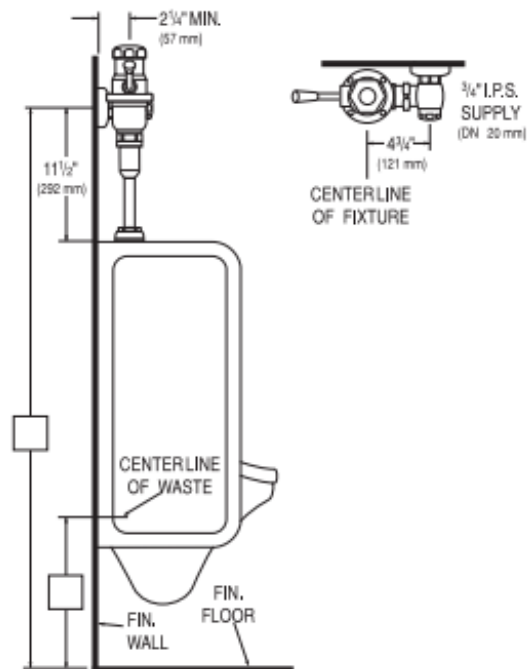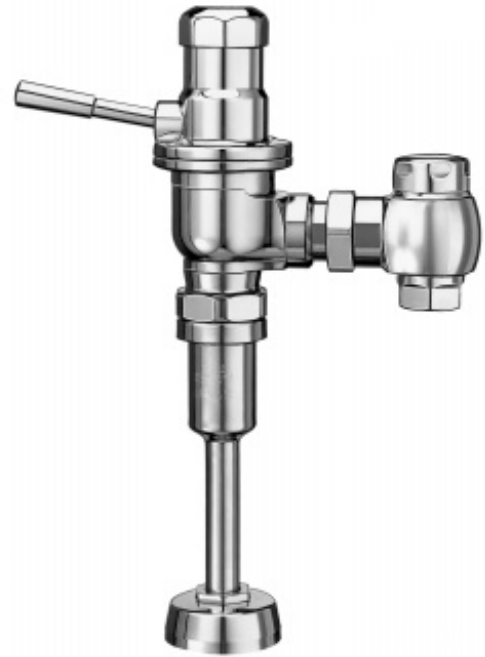

► Compliance & Certifications

**Made In The
USA**



This space for Architect/Engineer Approval