

► Code Number

24501010

► Description

Complete HET system with exposed manual Sloan® closet flushometer and vitreous china wall hung fixture.

► Flush Cycle

1.28 gpf/4.8 Lpf

► Specifications

FLUSHOMETER

- Free Spinning Vandal Resistant Stop Cap
- Sweat solder adapter with cover tube and cast wall flange with set screw
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine Resistance

FIXTURE



- Wall hung vitreous china elongated bowl
- Siphon jet flushing action
- 2 1/8" fully glazed trapway diameter
- Mounting hardware, carrier and toilet seat not included
- Recommended seats: Bemis - 1955CT/1955SST & 2155CT/2155SST
Church - 295CT/295SST & 2155CT/2155SST
- Water closet shall be in compliance to the applicable sections of ASME A112.19.2/CSA B45.1
- Compliant with Buy American Act when purchased as a combination
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Spud Coupling and Flange for 1 1/2" Top Spud
- Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.
- 1 1/2" I.P.S. top spud inlet

► Plumbing System Requirements


Minimum Operating Pressure: 25 PSI

Maximum Fixture Operating Pressure: 80 PSI

Minimum Operating Flow Rate: 18 GPM

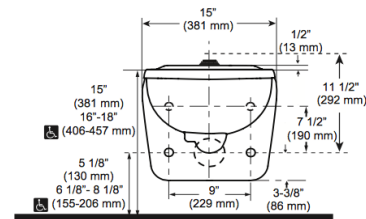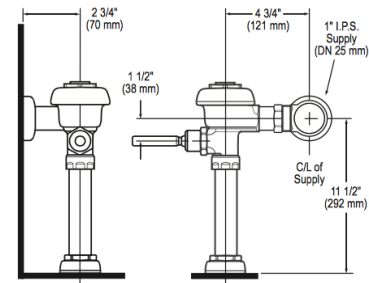

Designed to meet ADA standards when bowl is 17" - 19" high including seat

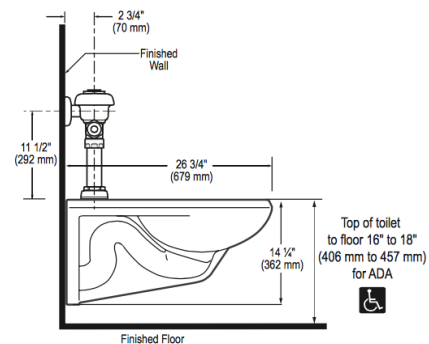

► Compliance & Certifications



This space for Architect/Engineer Approval