

► Code Number

3072621

► Description

Exposed, high-efficiency urinal flushometer for 3/4" top spud urinals.

► Flush Cycle

- 0.25 gpf (1.0 Lpf)

► Specifications



Quiet, Exposed, Piston Type, Chrome Plated Urinal Flushometer with the following features:

- Fixed Volume Piston with Filtered O-ring Bypass
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 3/4" I.P.S. Screwdriver Bak-Chek® Angle Stop with Control Stop Plug
- Vacuum Breaker Flush Connection
- Spud Coupling, Wall and Spud Flanges for 3/4" Top Spud
- Cast Wall Flange with Set Screw
- Sweat Solder Adapter with Cover Tube
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories

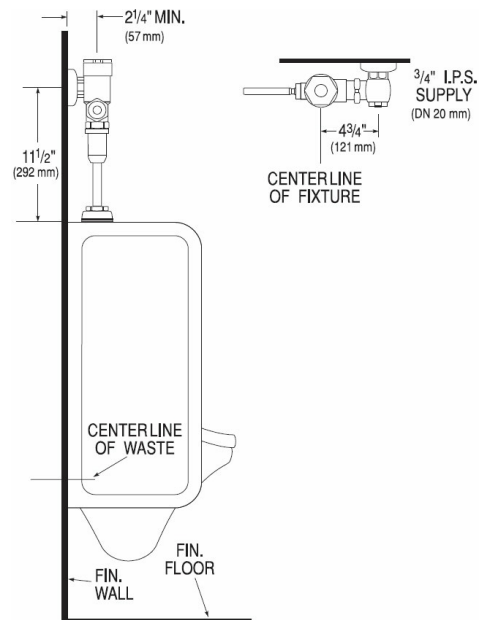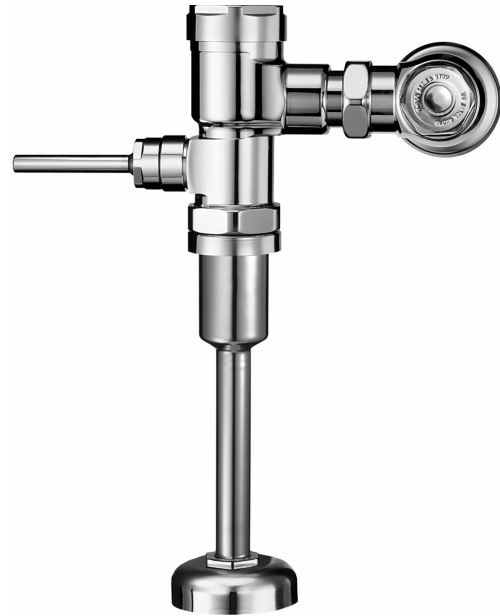

► Disclaimer

All information contained within this document subject to change without notice.

► Compliance & Certifications

Made In The
USA

HEU
HIGH-EFFICIENCY URINAL



This space for Architect/Engineer Approval