

► Code Number

3520025

► Description

Concealed Water Closet Flushometer, for floor mounted or wall hung top spud bowls.

► Flush Cycle

1.28 gpf/4.8 Lpf

► Specifications

- Quiet, concealed piston type manual flushometer with the following features:
- Metal Direct Acting, Non-Hold-Open Push Button with Triple Seal Handle Packing
- Fixed Volume Piston with Filtered O-ring Bypass
- Self-cleaning Xpelor® Bypass
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Vacuum Breaker
- Adjustable Tailpiece
- Chrome Plated Exposed Flushometer Parts
- Elbow Flush Connection, Spud Coupling, Wall and Spud Flanges for 1½" Exposed Top Spud
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Low Consumption Flush Accuracy
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.

► Variations

E - 1" Straight Stop Variation

10 3/4 LDIM

► L Dimension


Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾" (70 mm).

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.



Model Crown 153 Shown

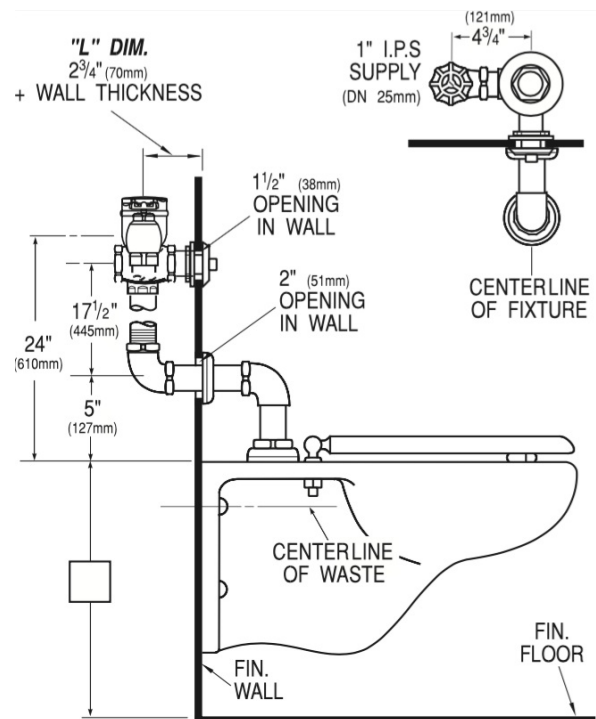

Model Crown 153 Shown

► Compliance & Certifications



Made In The
USA



This space for Architect/Engineer Approval