

► Code Number

3770001

► Description

Solenoid Activated Sloan® Model Flushometer for floor mounted or wall hung rear spud fixtures. Model "ES" Flushometers are activated remotely by an electric push button (not included). Sloan "ES" Flushometers offer solutions for installations that require automatic, remote or other Flushometer control requirements.

► Specifications


Single Flush, Quiet, Exposed, Diaphragm Type, Chrome Plated Closet Flushometer with the following features:

- Quiet, diaphragm type, chrome plated closet Flushometer and vitreous china water closet with the following features:
- User Friendly Three (3) Second Flush Delay
- Non-Hold-Open Integral Solenoid Operator
- High Chloramine Resistant PERMEX® Synthetic Rubber Diaphragm with Linear Bypass and Vortex Cleansing action
- Solenoid Wall Flange (for 2-gang Electrical Box)
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with free spinning vandal resistant stop cap
- Free spinning Vandal Resistant Stop Cap and Adjustable Tailpiece
- High Back Pressure Vacuum Breaker Flush Connection with One-Piece Bottom Hex Coupling Nut, Spud Coupling and Flange for 1½" Top Spud
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange w/Set Screw
- High copper, low zinc brass castings for dezincification resistance
- Non-Hold-Open Integral Solenoid Operator, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037.

► Transformer Options

- ☐ ESM — Modular Plug Solenoid Lead (24 VAC only) (For use with Sloan Programmed Water Technologies Microplumb Control Systems)
- ☐ 120 VAC Solenoid Operator
- ☐ 24 VAC Solenoid Operator

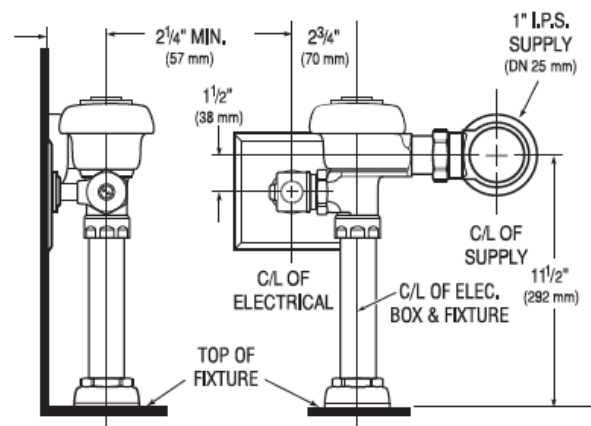

► Practical

Solid state electronic circuitry assures years of dependable, trouble-free operation.

► Automatic

Sloan OPTIMA® equipped Flushometers provide the ultimate in sanitary protection and automatic operation.

► Economical

Automatic operation and a low flush volume provide water savings over other flushing devices. Reduces maintenance and operation costs.

► Compliance & Certifications



This space for Architect/Engineer Approval