

► Code Number

12001006

► Description

Complete system with exposed manual Crown® piston urinal flushometer and vitreous china urinal.

► Flush Cycle

- 0.125 gpf/0.5 Lpf

► Flushometer Specification


- Flex Tube Dual Filtered Bypass Diaphragm designed for improved life and reduced maintenance
- Non-Hold-Open Handle, Fixed Metering Bypass and no external volume adjustment to ensure water conservation
- Fixed Volume Piston with Filtered O-ring Bypass
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Handle Packing, Stop Seat and Vacuum Breaker molded from PERMEX® rubber compound for chloramine resistance
- Valve designed to accept Low and Ultra-Low Consumption Pistons only to ensure Water Conservation
- Spud coupling flange for 3/4" top spud
- 3/4" I.P.S. Screwdriver Bak-chek® angle Stop
- ADA Compliant Solar-Powered Solis® Infrared Sensor for automatic "No Hands" operation
- infrared Sensor with Multiple-focused, Lobular Sensing fields for high and low target detection
- Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037/ ASME A112.19.2/CSA B45.1
- Sweat Solder Adapter w/Cover Tube and Cast Wall Flange with Set Screw

► Urinal Specifications

- Washdown flushing action
- All mounting hardware included
- Integral flushing rim
- 100% factory flush tested
- Carrier not included
- Vandal resistant strainer assembly included
- Compliant to the applicable sections of ASME A112.19.2/CSA B45.1
- Compliant with Buy American Act when purchased as a combination
- 2" NPT outlet flange
- 3/4" I.P.S. top spud inlet
- Wall hung vitreous top spud china
- Large footprint to cover old caulk lines

► Plumbing System Requirements

- Maximum Static Pressure: 80 PSI
- Minimum Flowing Pressure: 25 PSI

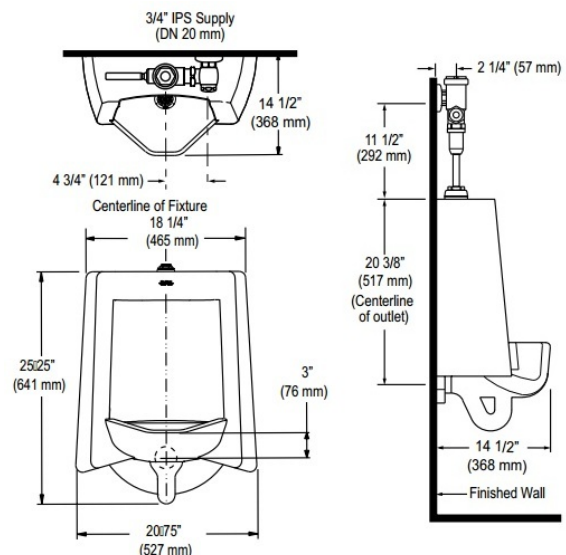

► Compliance & Certifications



ASME A112.1.3



► Disclaimer

All information contained within this document subject to change without notice.

NOTE: All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

This space for Architect/Engineer Approval



Retrofit Urinals
WEUS-1200.1006-0.125 Crown

--