

► Code Number

3070802

► Description

Exposed, Water Closet Flushometer for top inlet squat toilets.

► Flush Cycle


Model 136-1.6 Low Consumption (1.6 gpf/6.0 Lpf) - Test

► Specifications

- Trap Primer
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Vacuum Breaker Flush Connection
- Quiet, Exposed, Piston Type, Chrome Plated Closet Flushometer with the following features:
- Fixed Volume Piston with Filtered O-ring Bypass
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Locking Vandal Resistant Stop Cap
- Handle Packing, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- Valve Body, Cover and Tailpiece shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME A112.19.2.
- Spud Coupling, Wall and Spud Flanges for 1½" Top Inlet

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

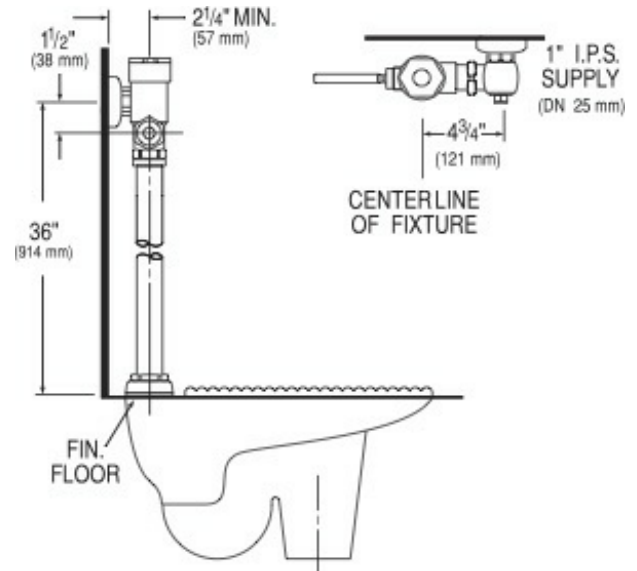

► Compliance & Certifications

Made In The
USA



This space for Architect/Engineer Approval