

Part No: 475-916F

Fabricated Fittings

Wye

Desc: 24X16 PVC RED WYE SOC SCH40 100PSI FAB G

MSRP: 6815.6

Part Code: 047

Weight(lbs): 235.851

Weight(kg): 106.98

Weight(gm): 106980

Size: 24"X24"X16"


Color: WHITE

Material: PVC

Schedule SCH 40

Connection Socket X Socket X Socket

Type Reduction

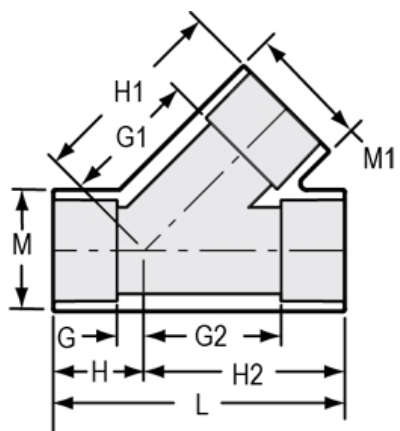

$G = 6 - \frac{3}{8}$	$G1 = 30 - \frac{1}{8}$	$G2 = 30 - \frac{3}{8}$	$H = 18 - \frac{3}{8}$	$H1 = 38 - \frac{1}{8}$
$H2 = 42 - \frac{3}{8}$	$L = 60 - \frac{3}{4}$	$M = 25 - \frac{3}{8}$	$M1 = 17$	

Fabricated Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; $\pm \frac{1}{4}$ & larger $\pm \frac{1}{2}$ inch.

H = Intersection of center lines to face of fitting; 90° elbows, tees, crosses; $\pm \frac{1}{4}$ inch.; wyes $\pm \frac{1}{2}$ inch; 14" & larger inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; $\pm \frac{1}{4}$ inch; 14" & larger $\pm \frac{1}{2}$ inch.

L = Overall length of fittings; $\pm \frac{1}{2}$ inch; wyes ± 1 inch; 14" & larger ± 1 inch.

M = Outside diameter of socket/thread hub; $\pm \frac{1}{4}$ inch.

N = Socket bottom to socket bottom; couplings; $\pm \frac{1}{2}$ inch.

W = Height of cap; $\pm \frac{1}{4}$ inch.

Typical Fabricated Dimension References

