

Part No: R4235-101

FlameGuard®

Brass Transition Fittings

Desc: 3/4X1/2 CPVC FG FEM AAPT SOCXBRFPT W/POS

MSRP: 13.02

Part Code: 076

Weight(lbs): 0.148

Weight(kg): 0.067

Weight(gm): 67

Size: 3/4"X1/2"


Color: ORANGE

Material: CPVC

Connection Socket x Brass Fipt (Position Ring)

Type Reduction

NOTE Not intended To Convey Or Dispense Water For Human Consumption Through Drinking Or Cooking

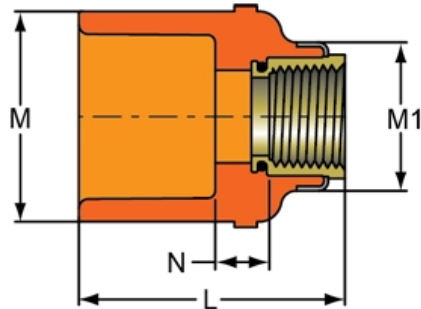

L = 2- 1/32

M = 1- 7/16

M1 = 1- 3/16

N = 15/32

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

