

Part No: W4235-101SR

FlameGuard®

**Special Reinforced (SR)
Transition Fittings**

Desc: 3/4X1/2 CPVC FG FEM ADPT W/WRENCH FLATS

MSRP: 7.87

Part Code: 076

Weight(lbs): 0.095

Weight(kg): 0.043

Weight(gm): 43

Size: 3/4" x 1/2"


Color: ORANGE

Material: CPVC

Connection Socket x SR Fipt (Wrench Flats)

Type Reduction

Note M=Flat-to-Flat Dimension

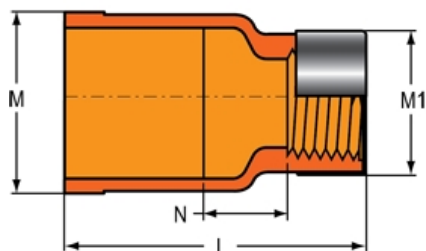

L = 2- 9/32

M = 1-13/32

M1 = 1- 3/16

N = 17/32

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

