

Part No: HTS2S-577C

Schedule 80 PVC & CPVC

Hot-Tap Saddle

Desc: 8X1-1/2 CPVC HOT TAP SDL EPDM S/S CUTTER

MSRP: 1431.47

Part Code: 050

Weight(lbs): 7.685


Weight(kg): 3.486

Weight(gm): 3486

Size: 8 X 3/4 SOC (1"SPG)

Color: GRAY

Material: CPVC

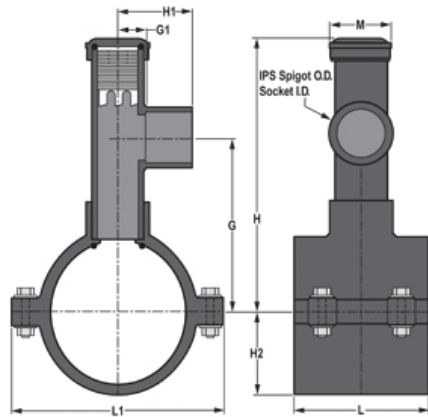

L = 8-1/2

G = 8-1/4

G1 = 1-1/4

H = 12-1/4

H1 = 2-11/16

H2 = 4-7/8

M = 2-7/8

L1 = 10-1/16

Connection Saddle x Socket (Spigot) - LEAD FREE

Hardware SS316

O-Ring EPDM

Cutter SS316

Type Hot-Tap

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; $\pm 1/32$ inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; $\pm 1/32$ inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; $\pm 1/32$ inch

L = Overall length of fittings; $\pm 1/16$ inch.

M = Outside diameter of socket/thread hub; $\pm 1/16$ inch.

N = Socket bottom to socket bottom; couplings; $\pm 1/16$ inch.

W = Height of cap; $\pm 1/16$ inch

Typical Molded Dimension References

