

Part No: HTS2S-416C

Schedule 80 PVC & CPVC

Hot-Tap Saddle

Desc: 4X3/4 CPVC HOT TAP SADDL EPDM S/S CUTTER

MSRP: 743.24

Part Code: 050

Weight(lbs): 1.77


Weight(kg): 0.803

Weight(gm): 803

Size: 4 X 3/4 SOC (1"SPG)

Color: GRAY

Material: CPVC

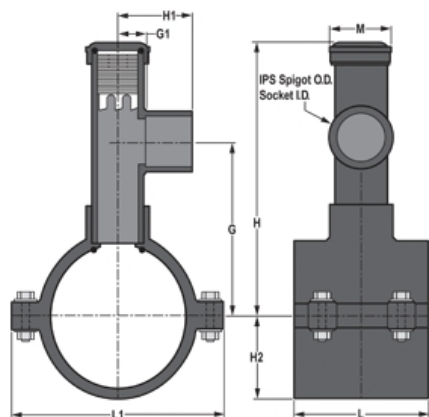

L = 3

G = 4-11/16

G1 = 1

H = 7-5/16

H1 = 2

H2 = 2-5/8

M = 2

L1 = 5-13/16

Connection Saddle x Socket (Spigot) - LEAD FREE

Hardware SS316

O-Ring EPDM

Cutter SS316

Type Hot-Tap

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; $\pm 1/32$ inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; $\pm 1/32$ inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; $\pm 1/32$ inch

L = Overall length of fittings; $\pm 1/16$ inch.

M = Outside diameter of socket/thread hub; $\pm 1/16$ inch.

N = Socket bottom to socket bottom; couplings; $\pm 1/16$ inch.

W = Height of cap; $\pm 1/16$ inch

Typical Molded Dimension References

