

Part No: SH118-07CO

FlameGuard®

Short Repair Coupling

Desc: 3/4 CPVC ORG SHORT REPAIR COUP SPIGXSOC

MSRP: 17.52

Part Code: 078

Weight(lbs): 0.306

Weight(kg): 0.139

Weight(gm): 139

Size: 3/4

Color: ORANGE


Material: CPVC

Connection Spigot x Socket

Type Short Repair Couplings

O-Ring EPDM

Pressure Rating 175 psi (1.21 Mpa) @ 150° F

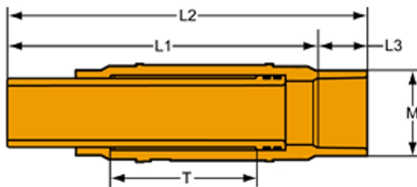

L1 = 4-11/16

L2 = 5-3/8

L3 = 3/4

M = 1-1/2

T = 2-3/16

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

