

Part No: HTS2S-527C

Schedule 80 PVC & CPVC

Hot-Tap Saddle

Desc: 6X1-1/2 CPVC HOT TAP SDLE EPDM SS CUTTER

MSRP: 1209.02

Part Code: 050

Weight(lbs): 4.685


Weight(kg): 2.125

Weight(gm): 2125

Size: 6 X 1-1/2 SOC (2"SPG)

Color: GRAY

Material: CPVC

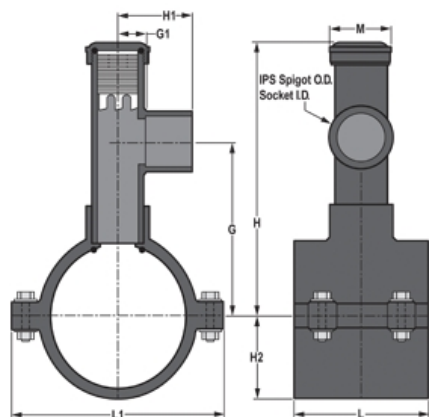

M = 2-7/8

L1 = 8-3/16

L = 4-1/8

G = 6-15/16

G1 = 1-1/4

H = 10-15/16

H1 = 2-11/16

H2 = 3-13/16

Connection Saddle x Socket (Spigot) - LEAD FREE

Hardware SS316

O-Ring EPDM

Cutter SS316

Type Hot-Tap

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

