

**Part No:** HT2-574

**Schedule 80 PVC & CPVC**

**Hot-Tap Saddle**

**Desc:** 8X3/4 PVC HOT TAP SDLE EPDM ZNC PLT BOLT

**MSRP:** 151.19

**Part Code:** 049

**Weight(lbs):** 9.345


**Weight(kg):** 4.239

**Weight(gm):** 4239

**Size:** 8 X 3/4 SOC (1"SPG)

**Color:** GRAY

**Material:** PVC

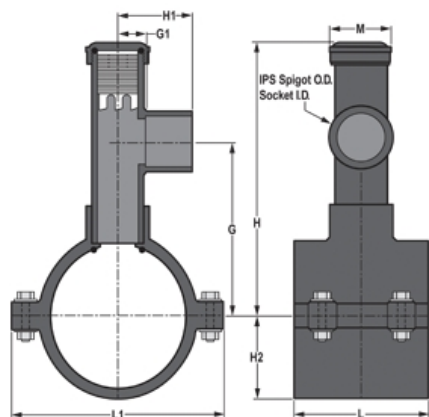

**L** = 8-1/2

**G** = 6-3/4

**G1** = 1

**H** = 9-5/16

**H1** = 2

**H2** = 4-7/8

**M** = 2

**L1** = 10-1/16

**Connection** Saddle x Socket (Spigot)

**Hardware** Zinc Plated

**O-Ring** EPDM

**NOTE** Not intended To Convey Or Dispense Water For Human Consumption Through Drinking Or Cooking

**Cutter** Brass

**Type** Hot-Tap

## Injection Molded Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

**H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

**L** = Overall length of fittings; ± 1/16 inch.

**M** = Outside diameter of socket/thread hub; ± 1/16 inch.

**N** = Socket bottom to socket bottom; couplings; ± 1/16 inch.

**W** = Height of cap; ± 1/16 inch

## Typical Molded Dimension References

