

Heat Traced Combination Shower with Eye/Face Wash System

SPECIFICATION



FEATURES:

- Wrapped with heat trace cable, insulation, easy access shell to protect to -50°F
- Activated by Powder coated high visibility yellow, aluminum triangular pull rod
- 8 in. Diameter yellow plastic showerhead
- Freeze Valve activates automatically below 40°F
- 1 in. NPTF chrome plated brass stay-open ball valve
- 1 in. IPS galvanized steel pipe
- 1 in. NPT male, top supply inlet
- 20 gpm @ 30 psi
- Universal emergency sign included

EYE/FACE WASH

- (2) yellow plastic spray outlets with automatic flow control and flip-top dust caps
- ½ in. NPT, 3-way chrome plated brass ball valve
- 4.5 gpm @ 30 psi
- Stainless steel push handle activation

ELECTRIC

- Self-regulating heating cable with braided metal shield
- Preset, hermetically sealed single pole contact switch. Temperature range 60° to 70° F thermostat
- Closed cell rubber foam insulation
- NEMA 4X water tight and dust tight, suitable for indoor or outdoor locations junction box
- 120 vac, 60 cycle, single phase
- Electrical Classification Class 1 Division 2 GRP. B, C, D
- Ground Fault Protection: Installation will require minimum 30 mA GFPD

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1, Factory Mutual Approved

OPTIONS:

ADD SUFFIX TO MODEL #

INTEGRAL

- Drench hose option
- Immersion well thermometer
- Scald protection valve
- 1 ½ in. union

- ☐ -DH
- ☐ -IT
- ☐ -SPV-7000
- ☐ -UN1

FIELD INSTALLED ACCESSORIES

- Area light for non-hazardous locations - clear globe ☐ -VPL
- Area light for Class 1 Division 2 areas - clear globe ☐ -VPL-C1D2

WARRANTY:

- 3 year limited

SEE REVERSE FOR ROUGH-IN DIMENSIONS

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
P: 800-537-2107 | F: 800-977-2747
WWW.SPEAKMANCOMPANY.COM

REVISION DATE: JANUARY 2015




Management Systems
Registered to ISO 9001

SPEAKMAN®

Heat Traced Combination Shower with Eye/Face Wash System SE-7001

SPECIFICATION

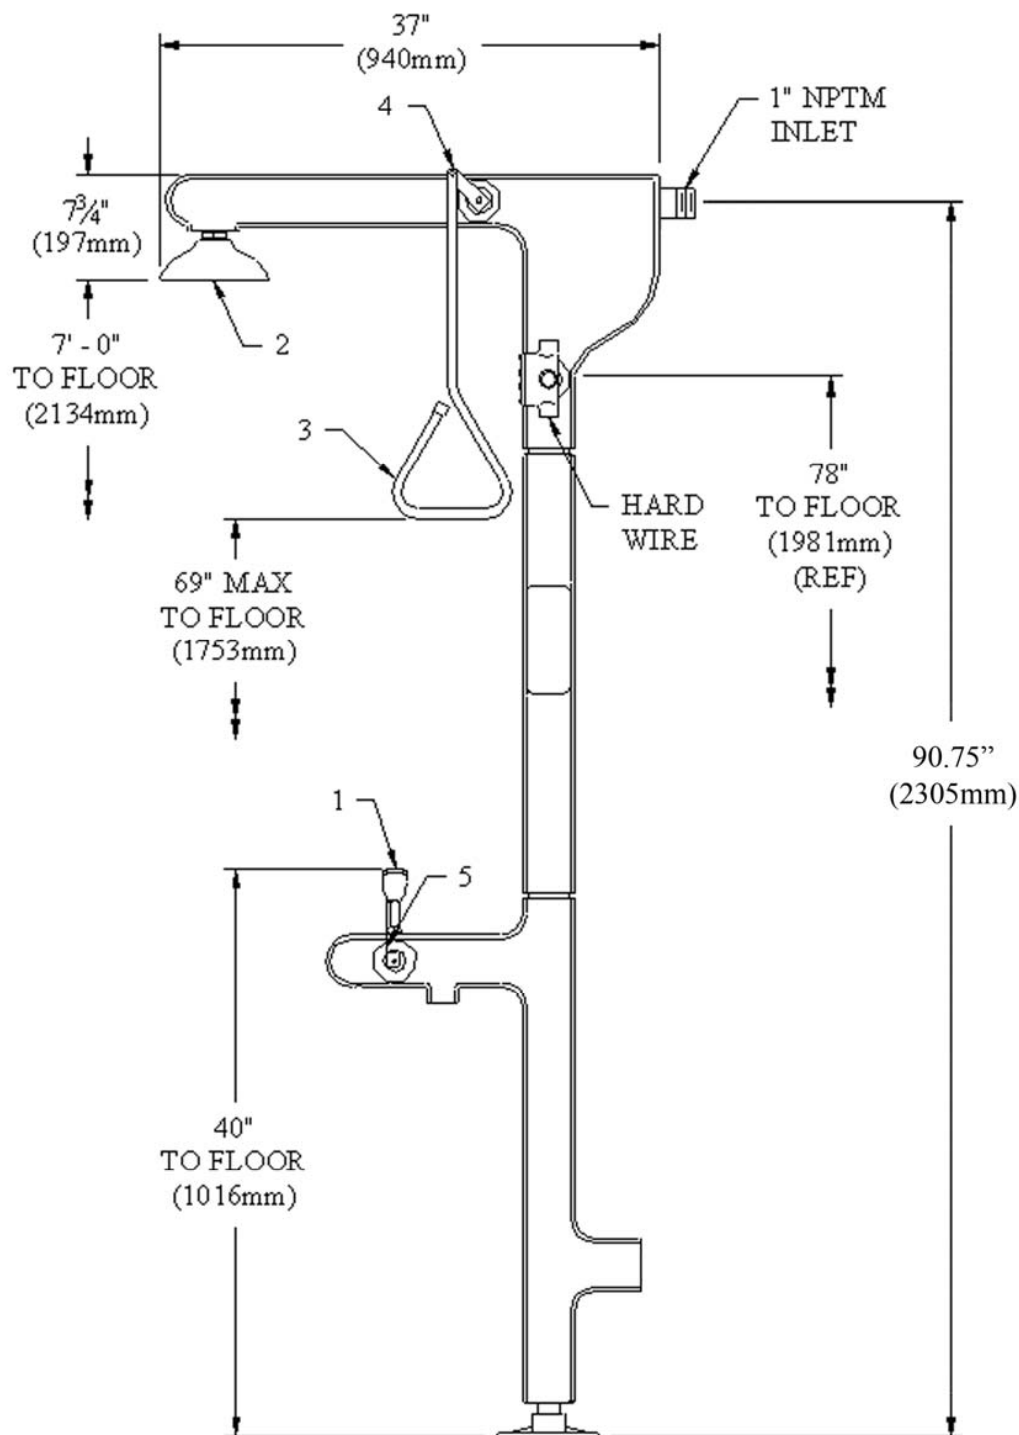

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720
P: 800-537-2107 | F: 800-977-2747
WWW.SPEAKMANCOMPANY.COM

REVISION DATE: JANUARY 2015



Management Systems
Registered to ISO 9001