

Part No: SH118-10CO

FlameGuard®

Short Repair Coupling

Desc: 1 CPVC ORG SHORT RPR COUPLING SPIGOTXSOC

MSRP: 28.41

Part Code: 078

Weight(lbs): 0.414

Weight(kg): 0.188

Weight(gm): 188

Size: 1

Color: ORANGE


Material: CPVC

Connection Spigot x Socket

Type Short Repair Couplings

O-Ring EPDM

Pressure Rating 175 psi (1.21 Mpa) @ 150° F

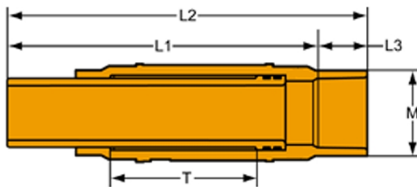

L1 = 4-3/4

L2 = 5-11/16

L3 = 15/16

M = 1-7/8

T = 2-1/16

Injection Molded Dimension References:

G = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

H = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

J = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

L = Overall length of fittings; ± 1/16 inch.

M = Outside diameter of socket/thread hub; ± 1/16 inch.

N = Socket bottom to socket bottom; couplings; ± 1/16 inch.

W = Height of cap; ± 1/16 inch

Typical Molded Dimension References

