SPEAKMAN® S-2460

Commercial Brass Showerhead

FEATURES:

- Vandal-resistant standard
- 1/2 in. NPT inlet
- Solid brass wall mounted showerhead
- 2 in. face 60 spray channels at three different angles to allow a full coverage shower
- Drilled for, but less mounting bolts
- Water conserving pressure compensating Autoflo® device reduces flow to a maximum of 2.5 gpm (9.46 L/min) flow rate



FINISH:

PC

OPTION:

Add suffix to model #

- Anchor plate assmbly with mounting screws ❑ -AP

COMPLIANCE:

- ASME A112.18.1/CSA B125.1 standard

WARRANTY:

- 1 year limited


Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720


P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

DIMENSIONS:


NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are 1/2" female NPT threads.

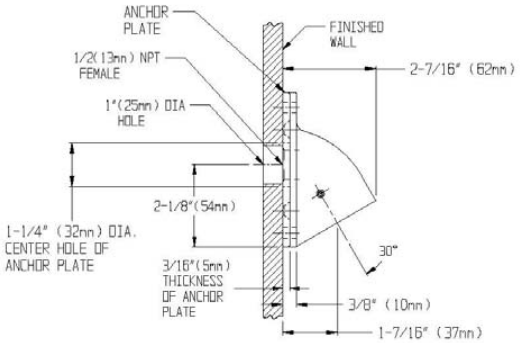

S-2460-AP

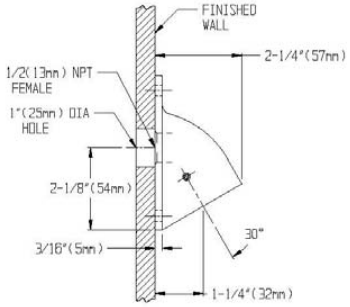

S-2460

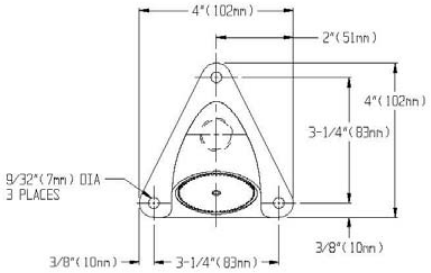

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017