SPEAKMAN® SE-625 SE-625-SS

Stainless Steel Combination Shower with Round Eye/Face Wash Bowl

MODELS:

❑ SE-625: Stainless steel combination shower and eye/face wash

❑ SE-625-SS: Stainless steel combination shower and eye/face wash with all stainless steel components



EYE/FACE WASH FEATURES:

(SE-490, SE-490-SS (SE-625-SS))

- (2) yellow plastic spray outlets with flip-top dust caps (SE-625)
- (2) stainless steel spray outlets with plastic dust covers (SE-625-SS)
- 300 series stainless steel bowl
- ½ in. NPT female stainless steel, full flow stay-open ball valve
- Stainless steel push handle activator
- ½ in. NPT female inlet
- 4.5 gpm @ 30 psi
- Universal emergency sign included

SHOWER FEATURES:

- 8 in. diameter stainless steel showerhead
- Internal 20 gpm regulator flow control
- 1 in. NPT female stainless steel, full flow stay-open ball valve
- Stainless steel triangular pull rod activation
- Stanchion is 1½ in. stainless steel, 18 gauge 304 stainless steel tubing
- 1¼ in. male inlet and waste
- 20 gpm @ 30 psi flowing

FINISHES:

Stainless Steel

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1

OPTIONS:

Add suffix to model #

• Anti-freeze protection valve	❑ -FPV
• Hand & foot operation	❑ -HFO
• Hand-held spray	❑ -HS
• Self-closing shower valve with chain & ring	❑ -SCSV
• Anti-scald protection valve	❑ -SPV

WARRANTY:

- 3 year limited


Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

DIMENSIONS:

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

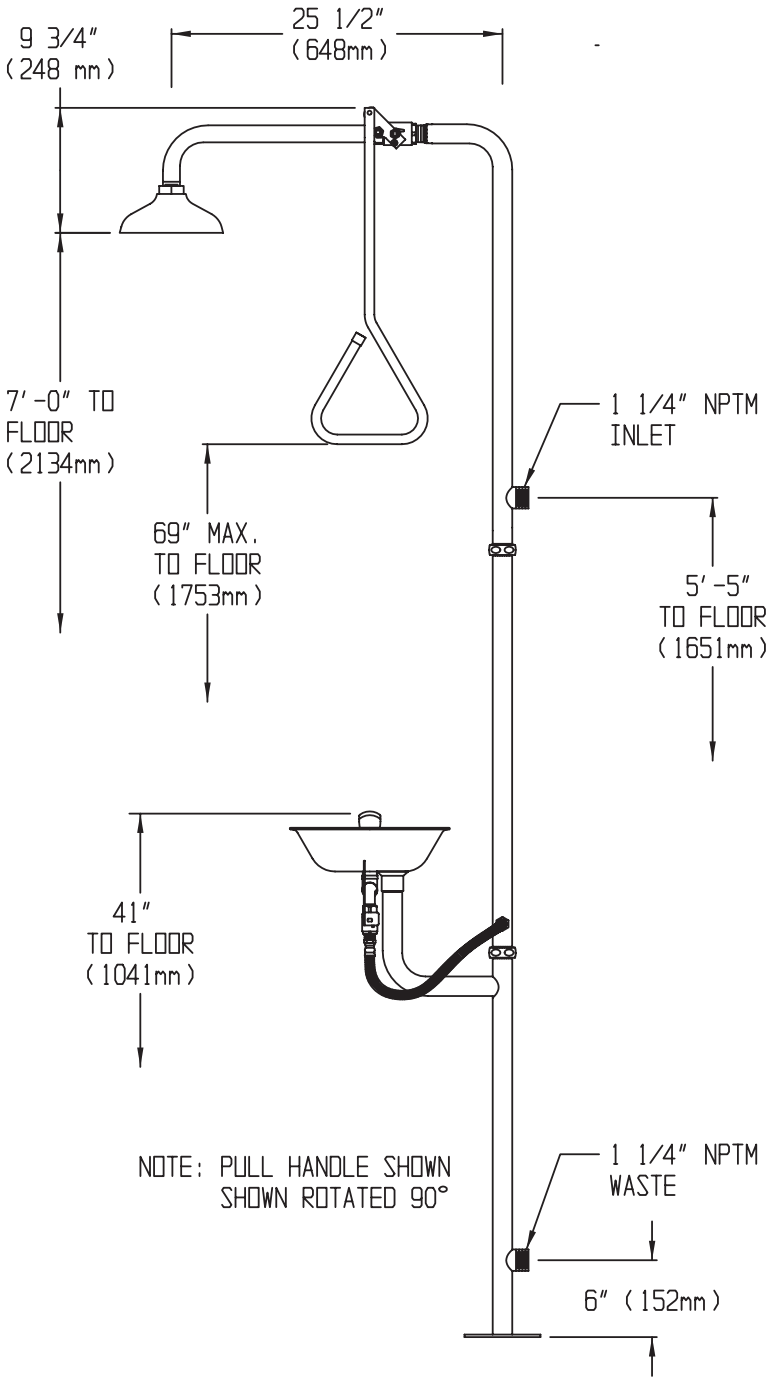

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

SPEAKMAN® SE-622

Stainless Steel Combination Shower with Rectangular Eyewash Bowl



EYE WASH FEATURES: (SE-505)

- (2) aerated yellow nylon spray outlets
- Stainless steel bowl
- ½ in. NPT female stainless steel full flow stay-open ball valve
- Stainless steel trigger bar activator
- 3.0 gpm @ 30 psi
- Universal emergency sign included

SHOWER FEATURES:

- 8 in. diameter stainless steel showerhead
- Internal 20 gpm flow control
- 1" NPT female stainless steel full flow stay-open ball valve
- Stainless steel triangular pull rod
- 1 ¼" NPT female inlet & waste
- 1 ½ in. stainless steel, 18 guage tubing
- Stainless steel floor flange
- 20 gpm @ 30 psi

FINISHES:

Stainless Steel

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1

OPTIONS:

Add suffix to model #

• Anti-freeze protection valve	❑ -FPV
• Hand & foot operation	❑ -HFO
• Hand-held spray	❑ -HS
• Self-closing shower valve with chain & ring	❑ -SCSV
• Anti-scald protection valve	❑ -SPV

WARRANTY:

- 3 year limited


Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

DIMENSIONS:

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

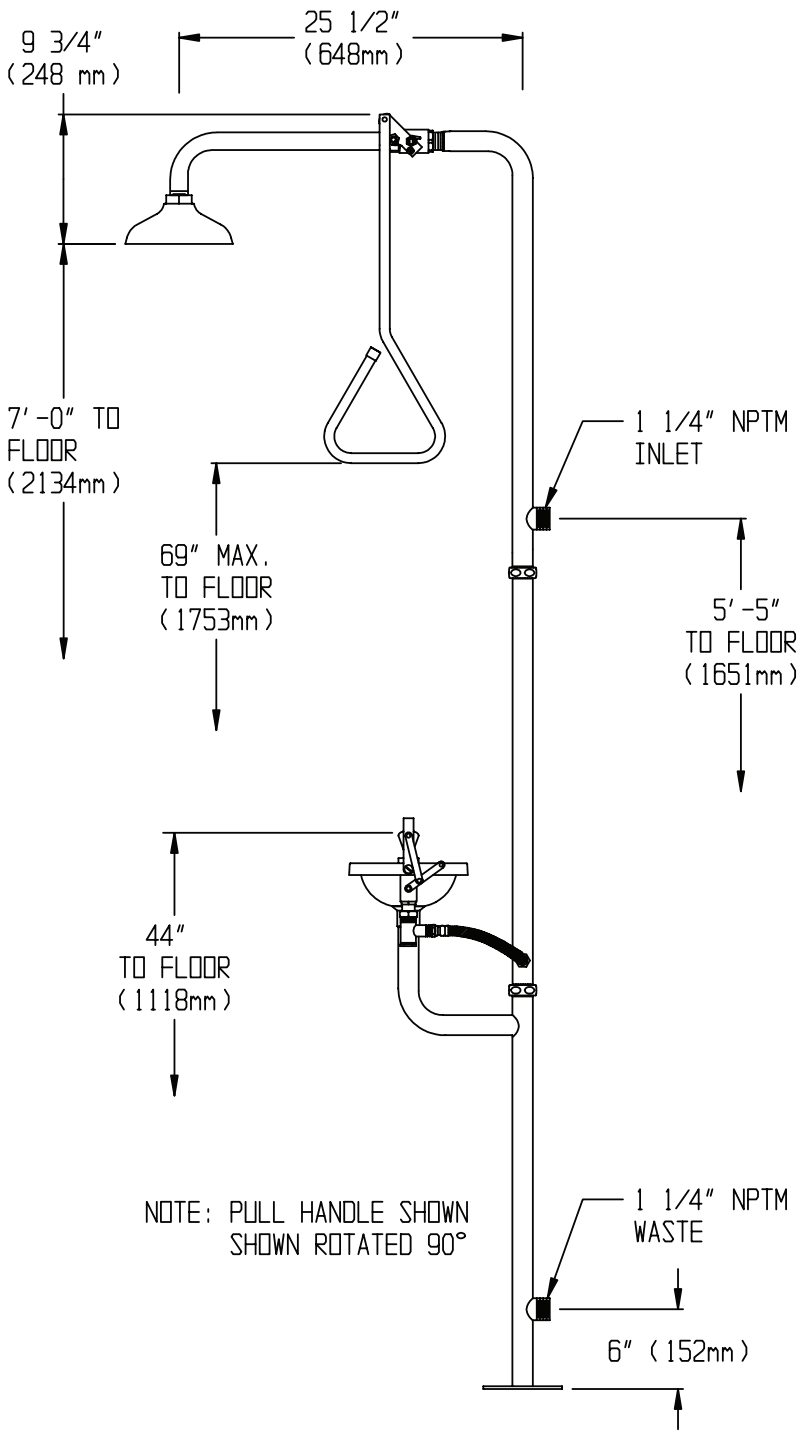

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

SPEAKMAN® SE-623

Stainless Steel Combination Shower with Rectangular Eye/Face Wash Bowl



EYE/FACE WASH FEATURES: (SE-400)

- (6) brass chrome-plated aerated sprays
- Yellow polypropylene shrouds
- Brass chrome-plated in-line strainer
- Stainless steel bowl
- ½ in. NPT stainless steel plated valve
- Stainless steel push handle activator
- ½ in. NPT female inlet
- 9.3 gpm @ 30 psi
- Universal emergency sign included

SHOWER FEATURES:

- 8 in. diameter stainless steel showerhead
- Internal 20 gpm flow control
- 1" NPT female stainless steel full flow stay-open ball valve
- Stainless steel triangular pull rod activation
- 1 ½ in. stainless steel 18 gauge tubing stanchion
- 1 ¼ in. NPT male inlet & waste
- 20 gpm @ 30 psi flowing

FINISHES:

Stainless Steel

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1

OPTIONS:

Add suffix to model #

- Anti-freeze protection valve ❑ -FPV
- Hand & foot operation ❑ -HFO
- Hand-held spray ❑ -HS
- Self-closing shower valve with chain & ring ❑ -SCSV
- Anti-scald protection valve ❑ -SPV

WARRANTY:

- 3 year limited


Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

DIMENSIONS:

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

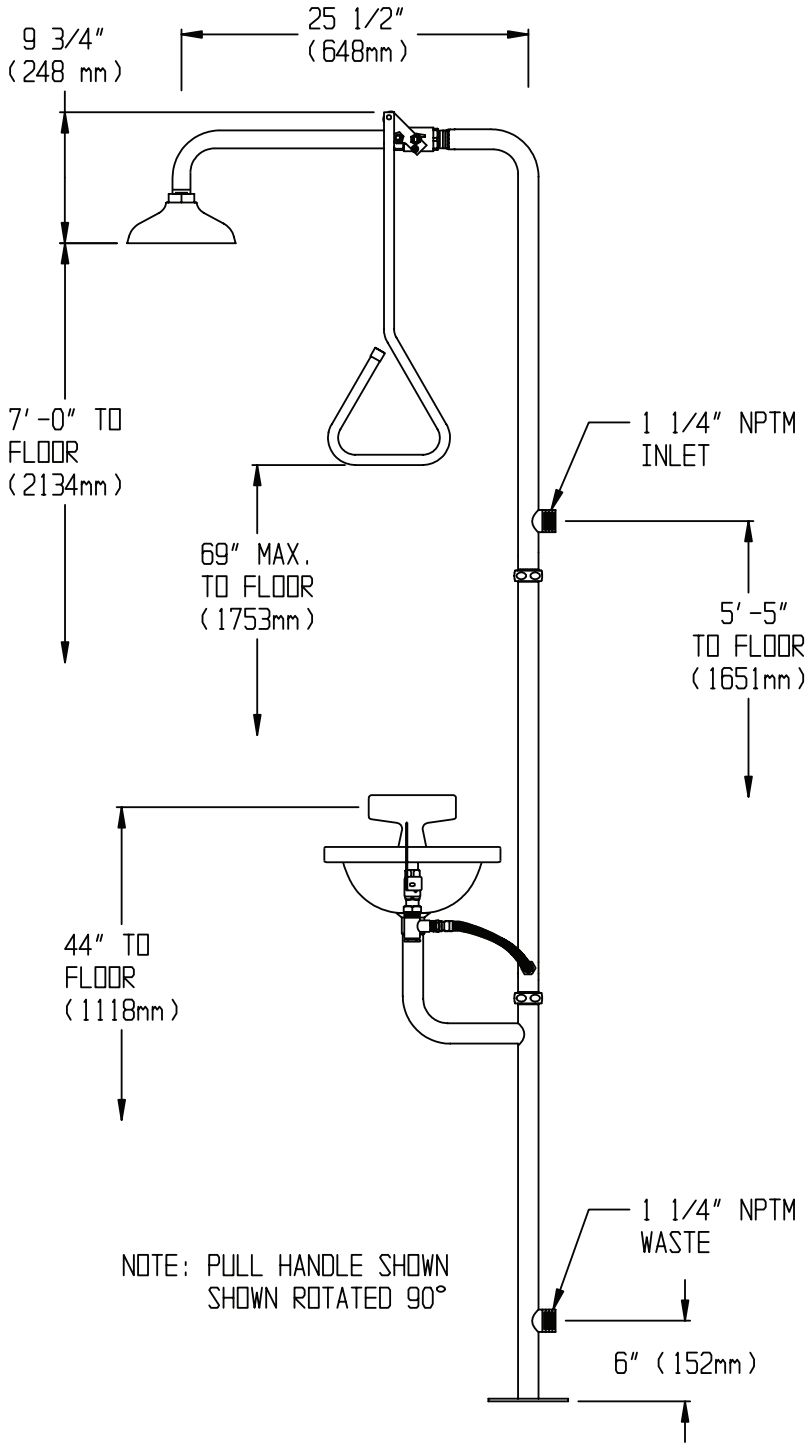

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

SPEAKMAN® SE-626

Stainless Steel Combination Shower with Round Eyewash System

EYEWASH FEATURES: (SE-582)

- (2) aerated yellow plastic spray outlets
- 300 series stainless steel bowl
- ½ in. NPT female stainless steel, full flow stay-open ball valve
- Stainless steel push handle activator
- ½ in. NPT female inlet
- 3.2 gpm @ 30 psi
- Universal emergency sign included



SHOWER FEATURES:

- 8 in. diameter stainless steel showerhead
- Internal 20 gpm regulator flow control
- 1 in. NPT female stainless steel, full flow stay-open ball valve
- Stainless steel triangular pull rod activation
- Stanchion is 1½ in. stainless steel, 18 gauge 304 stainless steel tubing
- 1¼ in. male inlet and waste
- 20 gpm @ 30 psi flowing

FINISHES:

Stainless Steel

COMPLIANCE:

- Certified to ANSI/ISEA Z358.1

OPTION:

- Substituting of stainless steel showerhead for standard plastic head

WARRANTY:

- 3 year limited


Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017

DIMENSIONS:

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

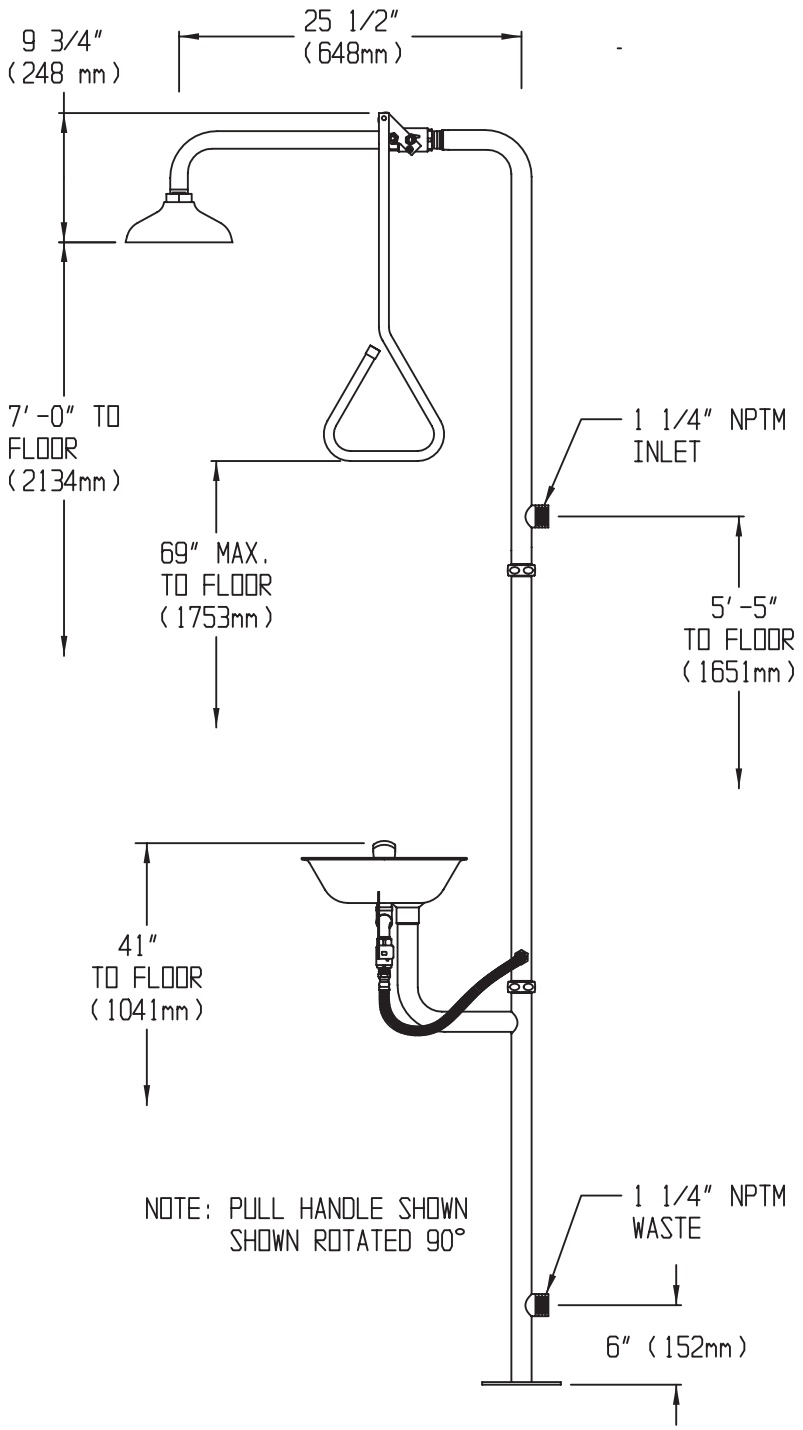

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: MARCH 2017