SPEAKMAN® SM-8400-P

Rainier™ Pressure Balance Valve with Diverter and Trim

FEATURES

VALVE:

- Square style
- Anti-scald pressure balance valve
- Built-in check valves
- Pressure balancing and ceramic temperature regulating cartridge
- Adjustable temperature limit stop
- Integral stops
- Diverter handle allows for transfer between two water outlets
- 1/2” NPT female tub outlet
- 1/2” sweat shower outlet
- 1/2” sweat inlets
- Includes rough-in template



TRIM:

- Square style
- Mounting plate with seal
- Metal handles
- Durable plastic trim plate

FINISH:

PC

COMPLIANCE:

- ASME A112.18.1/CSA B125.1 certified
- Meets ASSE 1016

WARRANTY:

- 5 Year Limited

Architect/Engineer Approval Space:


SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720


P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: DECEMBER 2016

Management Systems Registered to ISO 9001

DIMENSIONS:

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are 1/2" female copper sweat. 3. For ADA mounting locations, consult ADAAG, ANSI A117.1, or static regulations. Contractor pack valves & trim kits available.

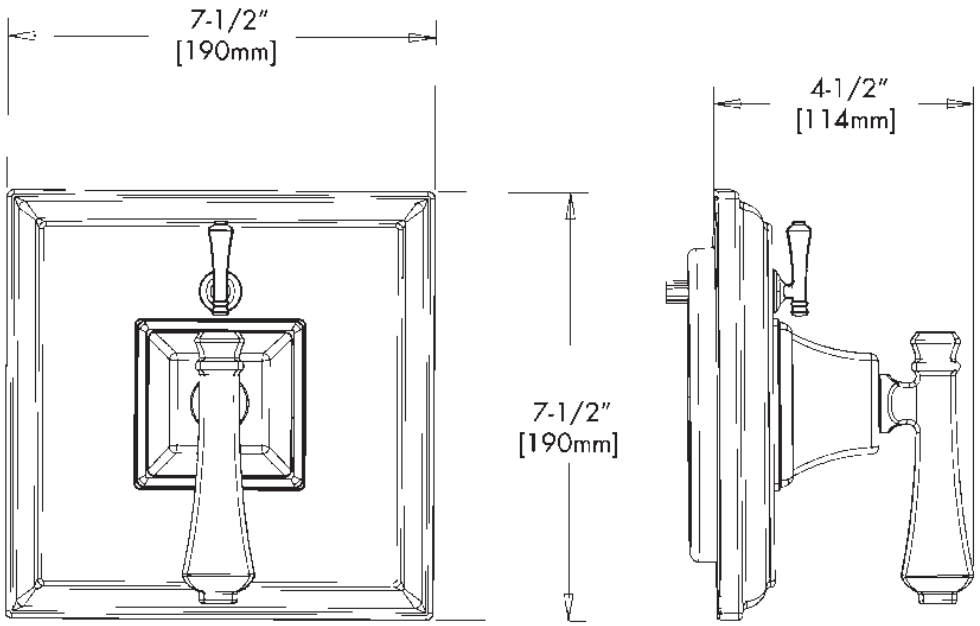

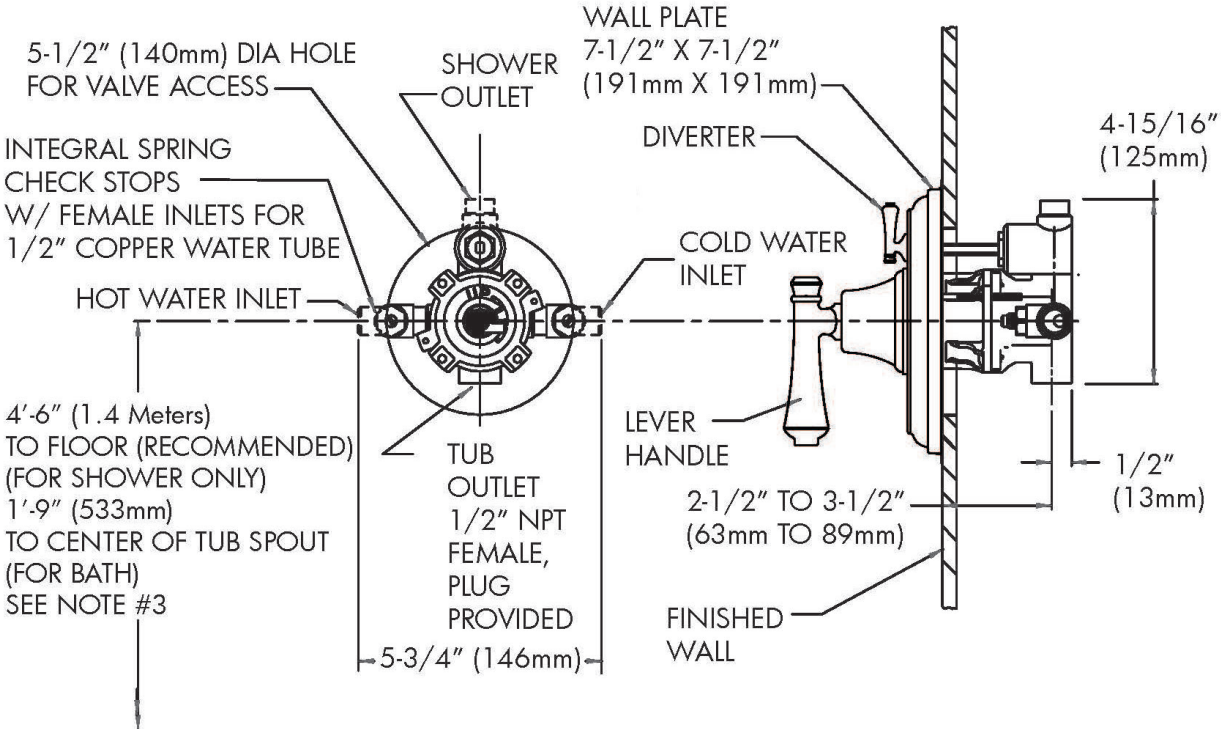

Rainier™ Shower Combination

FEATURES:

- Rainier Shower Head S-3018
- Arm and Flange S-2550
- Rainier Pressure Balance Diverter Valve and Trim SM-8400-P
- Rainier Tub Spout S-1563
- 2.5 gpm (9.5 L/min) flow rate

FINISH:

PC

COMPLIANCE:

- ASME A112.18.1/CSA B125.1 certified

MODELS:

❑ SM-8430-P: with S-1563 tub spout

❑ SM-8410-P: without S-1563 tub spout

WARRANTY:

- Consumer Shower Head: Limited Lifetime Warranty
- Commercial Shower head: 1 Year Limited
- Valve: 5 Year Limited
- Accessories: 1 Year Limited







Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: DECEMBER 2016

Management Systems Registered to ISO 9001

DIMENSIONS:

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice. 2. Unless otherwise specified, all inlets and outlets are 1/2" female copper sweat. 3. For ADA mounting locations, consult ADAAG, ANSI A117.1, or static regulations.

Contractor pack valves & trim kits available.

