

**Part No:** S1780C15

**Valves**

**Swing & Spring Check**

**Desc:** 1-1/2 PVC CL TU UTLTY SP CK VLV SOC EPDM

**MSRP:** 98.7

**Part Code:** 026

**Weight(lbs):** 1.329

**Weight(kg):** 0.603

**Weight(gm):** 603

**Size:** 1-1/2"

**Color:** CLEAR


**Material:** PVC

**Type** Utility Spring Check

**Connection** Socket (TU)

**Body Color** Clear

**Pressure Rating** 150 psi @ 73° F Full Flow (Open)  
75 psi Back Pressure (Closed)

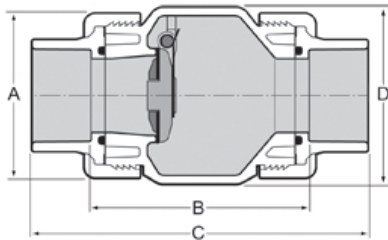

**A** = 3- 9/16

**B** = 4- 9/16

**C** = 7- 3/8

**D** = 3- 3/8

## Injection Molded Dimension References:

**G** = (LAYING LENGTH) intersection of center lines to bottom of socket/thread; 90° elbows, tees, crosses; ± 1/32 inch.

**H** = Intersection of center lines to face of fitting; 90° elbows tees, crosses; ± 1/32 inch.

**J** = Intersection of center lines to bottom of socket/thread; 45° elbows; ± 1/32 inch

**L** = Overall length of fittings; ± 1/16 inch.

**M** = Outside diameter of socket/thread hub; ± 1/16 inch.

**N** = Socket bottom to socket bottom; couplings; ± 1/16 inch.

**W** = Height of cap; ± 1/16 inch

## Typical Molded Dimension References

